

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER M-6-78
Relating to Certification of New Motorcycles

BAYERISCHE MOTOREN WERKE AG

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and,

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 2000 model-year Bayerische Motoren Werke AG exhaust emission control systems are certified as described below for four-stroke gasoline-powered motorcycles:

<u>Engine Family</u>	<u>Displacement Cubic Centimeters</u>	<u>Class</u>	<u>Exhaust Emission Control Systems & Special Features</u>
YBMXC01.2KLT	1171	III	Multiport Fuel Injection Three Way Catalytic Converter Heated Oxygen Sensor

Vehicle models and transmissions are listed on the attachment. Production motorcycles shall be in all material respects the same as those for which certification is granted.

The following are the exhaust emission standards and exhaust emission certification values for this engine family. The designated hydrocarbons standard shall be listed on the permanent tune-up label:

<u>Hydrocarbon Standards (Corporate Average) Grams per Kilometer</u>	<u>Hydrocarbons (Designated) Grams per Kilometer</u>	<u>Hydrocarbons (Certification) Grams per Kilometer</u>	<u>Carbon Monoxide (Standard) Grams per Kilometer</u>	<u>Carbon Monoxide (Certification) Grams per Kilometer</u>
1.4	0.8	0.7	12	3

BE IT FURTHER RESOLVED: That the above-described certification is subject to the following terms, limitations and conditions:

The above designated hydrocarbons standard shall be the exhaust limit for this engine family during the model year and therefore cannot be redesignated by the manufacturer. It represents the hydrocarbons exhaust emission standard applicable to this engine family that shall be applied when determining compliance of any motorcycle within this engine family pursuant to Section 2101 of Title 13, California Code of Regulations. It will also be used to determine compliance with the above corporate average hydrocarbons standard as required per Section 1958(b), Title 13 of the California Code of Regulations.


BE IT FURTHER RESOLVED: That the Executive Officer has been provided all material required to demonstrate certification compliance with the Board's emission control system warranty regulations (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles."

BE IT FURTHER RESOLVED: That these motorcycles are found exempt from compliance with the Air Resources Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" pursuant to Executive Order G-70-16-E.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

Executed at El Monte, California this 7th day of September 1999.

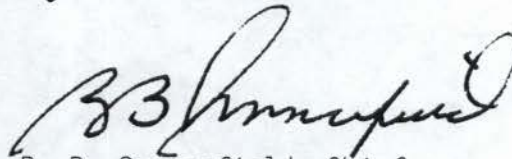

R. B. Summerfield, Chief
Mobile Source Operations Division

Motorcycle Model Summary Form

65. Model Designation	66. Wors t Case	67. Disp. (cc)	68. Bore / Stroke (mm)	69. Basic Ignition Timing (degrees)	70 Power (kW)	71 Rated Speed (RPM)	72 Rated Torque (Nm)	73. Rated Speed (RPM)
K1200LT	X	1171	70,5/75	6° static	74	6750	115	4750

65. Model Designation	74. EIM (kg)	75. Loaded Vehicle Weight Range (kg)	76 Road Load (nt)	77 Total Vehicle Mass (kg)	78 Full Weight with All Factory Options (kg)	79. Trans. Type	80 N/V
K1200LT	450	446 - 455	164,9	600	370	M-5	30.54

Engine Family: YBMXC01.2KLT

Motorcycle Test Information Form

27. Are you carrying over test results from a previously certified family? Yes No
 a) If yes, indicate family name: XBMXC01.2KLT
 b) Is the family being certified identical to the family from which the data is being carried over? Yes
28. Model Designation of Test Vehicle: K1200LT
29. Test Information Number: KLT
30. Vehicle ID: V 401660
31. Service Accumulation Duration: 15100 (km)
32. Maximum Rated Power: 74 kW @ 6750 RPM
33. Displacement: 1171 cc
34. Certification Fuel: 95 RON
35. Test Data Set: 1

36. Road Load: 164.9 N
37. Inertia Mass: 450 kg
38. N/V: 30,54
39. EVAP. Bench Test Method Approved:
Date: 1998
Reference: V 401514
40. Unscheduled Maintenance: Yes No
41. If yes, Vehicle Log provided: _____

42. Exhaust Emission Deterioration Factors:

Test Number	System Kilometers	Emission Values	
		HC	CO
1	3659	0,393	2,433
2	9982	0,552	2,848
3	10019	0,712	4,106
4	15100	0,524	2,547
5			
6			
7			
Interpolated Values at <u>15 000 km</u> :		HC = <u>0.6146</u>	CO = <u>3.0874</u>
Extrapolated Values at <u>30 000 km</u> :		HC = <u>0.8106</u>	CO = <u>3.3809</u>

Check one:	
Regular DF	<input checked="" type="checkbox"/>
Modified DF	<input type="checkbox"/>
If different vehicle specify vehicle ID	

43. Emission Test Results:

Official Test Results		Test 1	Test 2	Test 3	Test 4
g/km	CO	2,547			
g/km	CO ²	139,9			
g/km	HC	0,524			
g/test	Evap.	0,910			

	Deterioration Factors
(X)	1,095

(X)	1,319
(+)	0,022

44. Certification Levels:

g/km	CO	<u>2,789</u>		
g/km	HC	<u>0,691</u>		
g/test	Evap.	0,932		

Motorcycle Engine Family Information Form

RECEIVED

JUL 29 1999

Division Chief/MSOD (RBS)

1. Manufacturer: BMW
2. Certification Contact Person, address, phone, and fax:
 Mr. Gordon B. Keil
 BMW of North America, Inc.
 Montvale, N.J. 07645
 Phone No. 201-573 2195
 Fax No. 201-930 8402

3. Model Year: 2000
4. Process Code: new
 (new, correction, revision, r/c, f/f. etc.)
5. Engine Family: YBMXC01.2KLT
 50s Engine Code: X
 49s Engine Code: _____
 Calif. Engine Code: _____
6. Emission Control System: MFI, TWC, HO₂S
7. Calif. Designated Standard: 0.8 g/km HC
8. Projected Annual Sales _____ total
 _____ California
9. New Technology ___ Yes No
 If yes, cite the correspondence or reference the
 submittal document: _____

10. Displacement: 1171 cc
11. Number of Cylinders: 4
12. Cylinder Arrangement: inline
13. Cylinder Head Configuration: OHC
14. Type of Cooling: Water
15. Combustion Cycle: 4 stroke
16. Method of Aspiration: natural
17. Fuel System: FI
18. Number of Catalytic Converters: 1

0.56

19. Adjustable Parameters:

Parameter(s)	Adjustable Range (or NA)	Tamper Resistance Method (or NA)	Method Approved
Ignition timing	N.A.	N.A.	
Idle speed	1050 ± 50 RPM 950 ± 50 RPM opt.	N.A.	

20. AECDs In the Emission Control Systems:

Exhaust System	Evaporative System
AECDs In System: <u>ECM</u> <u>Fuel pressure regulator</u> <u>Coolant temperature sensor</u> <u>Air temperature sensor</u> <u>Throttle position sensor</u> <u>Oxygen sensor</u> <u>Throttle valve actuator</u>	AECDs In System: <u>Purge valve</u> _____ _____ _____ _____

Engine Family: YBMXC01.2KLT

Evaporative Emission Information

- | | |
|---|---|
| 45. Evaporative Family: <u>YBMXC0024KLT</u> | 53. Engine Displacement Class: <u>III</u> |
| 46. Number of Evap. Canisters: <u>1</u> | 54. Storage Medium Composition: <u>charcoal</u> |
| 47. Design Working Capacity: <u>24 g</u> | 55. Evap. Canister Medium Volume: <u>450 cm³</u> |
| 48. Configuration: <u>plastic can</u> | 56. Evap. Family Sales: <u>560 (California)</u> |
| 49. Number of Storage Areas: <u>1</u> | 57. Engine Code: <u>50s</u> |
| 50. Fuel Reservoir Volume: <u>23 l</u> | 58. Evap. Emission Family Code: <u>50s</u> |
| 51. Vent System Configuration: <u>purge</u> | 59. Evap. Emission Family Group: <u>NA</u> |
| 52. Nominal Tank Capacity: <u>23 l</u> | 60. Overall Evap D.F. = <u>0.022</u> |

Bench DF

61. Test Vehicle ID: V 401514
 62. Test Results:

Test Number	System Kilometers	Evap. Emission Values (g/test)
1	3500	0,397
2	10000	0,267
3	15000	0,443
4		
5		
6		
7		
Interpolated Values at 15000 km: = 0.385		
Extrapolated Values at 30000 km: = 0.428		
Bench Test D.F. = 0.043		

Check One:	
Regular DF:	X
Modified DF:	
If different vehicle specify the vehicle ID	

Vehicle DF

63. Test Vehicle ID: V 401660
 64. Test Results:

Test Number	System Kilometers	Evap. Emission Values (g/test)
1	3659	1,74
2	9982	1,75
3	10019	1,48
4	15100	0,91
5		
6		
7		
Interpolated Values at 15000 km: = 1.101		
Extrapolated Values at 30000 km: = 0.059		
Vehicle Test D.F. = -1.042 = 0.0		

Processed by S. Huda Date 9/2/99

Reviewed by [Signature] Date 09/03/99