

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-4-204-3

Relating to Certification of New Medium-Duty Motor Vehicle Engines

NAVISTAR INTERNATIONAL TRANSPORTATION CORPORATION

Pursuant to the authority vested in the Air Resources Board by Sections 43100, 43102 and 43103 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following 1999 model-year Navistar International Transportation Corporation diesel-cycle engines are certified for medium-duty vehicles with a manufacturer's gross vehicle weight rating (GVWR) of 8,501 to 14,000 pounds:

Fuel Type: Diesel

<u>Engine Family</u>	<u>Engine Displacement Liters (Cubic Inches)</u>	<u>Exhaust Emission Control Systems and Special Features</u>
XNVXH07.3ACB	7.3 (444)	Turbocharger Charge Air Cooler Engine Control Module Oxidation Catalytic Converter

Engine models and codes are listed on attachments.

The certification exhaust emission standards for this engine family in grams per brake horsepower-hour are:

<u>Non-Methane Hydrocarbons + Nitrogen Oxides</u>	<u>Carbon Monoxide</u>	<u>Particulates</u>
3.9	14.4	0.10

The certification exhaust emission values for this engine family in grams per brake horsepower-hour are:

<u>Non-Methane Hydrocarbons + Nitrogen Oxides</u>	<u>Carbon Monoxide</u>	<u>Particulates</u>
3.4	3.7	0.08

BE IT FURTHER RESOLVED: That, the listed engine models are certified to the optional standards and test procedures applicable to incomplete and diesel medium-duty vehicles of 8,501 to 14,000 pounds GVWR pursuant to Title 13, California Code of Regulations, Section 1956.8(g).

BE IT FURTHER RESOLVED: That the aforementioned engine family has been conditionally certified subject to the following conditions:

1. Any engine which employs a defeat device shall not be covered by this Executive Order.
2. Within 180 days following the issuance of Executive Order A-4-204, the manufacturer must show cause, to the satisfaction of the Executive Officer or his designee, that the strategy for fuel injection timing, including timing during the fuel economy mode, is not a defeat device.

BE IT FURTHER RESOLVED: That the listed engine models and vehicle models shall be subject to the in-use compliance provision applicable to 1995 and subsequent model-year medium-duty vehicles, set forth in Title 13, California Code of Regulations, Section 2139(c).

BE IT FURTHER RESOLVED: That the listed engine models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).


BE IT FURTHER RESOLVED: That the listed engine models comply with the on-board diagnostic system for the aforementioned model year pursuant to Title 13, California Code of Regulations, Section 1968.1 ("Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines").

BE IT FURTHER RESOLVED: That, for the listed engine models, the manufacturer has submitted the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Engines certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachments.

Executed at El Monte, California this 13th day of May 1998.

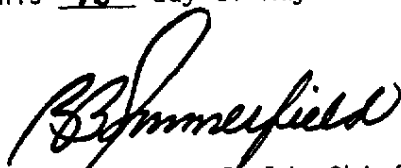

R. B. Summerfield, Chief
Mobile Source Operations Division

LARGE ENGINE MODEL SUMMARY

Manufacturer: Navistar E.O.#A-4-204- 3 _____ Process Code: New Submission _____

EPA Engine Family: XNVXH0Z.3ACB Manufacturer Family Name: L3DUT

1.Engine Code	2.Engine Model	3.BHP @RPM (SAE Gross)	4.Fuel Rate: mm/stroke @ peak HP (for diesel only)	5.Fuel Rate: (lbs/hr) @ peak HP (for diesels only)	6.Torque @ RPM (SEA Gross)	7.Fuel Rate: mm/stroke @ peak torque	8.Fuel Rate: (lbs/hr) @ peak torque	9.Emission Control Device Per SAE J1930
A250C	A250C	250@2700	102.0	84.6	508@1600	77.8	55.6	DI,ECM,FAA,OC

TC, CAC