

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-259-44-B-1  
Relating to Certification of New Motor Vehicles

SUZUKI MOTOR CORPORATION

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Orders G-45-3 and G-45-4;

IT IS ORDERED AND RESOLVED: That 1995 model-year Suzuki Motor Corporation exhaust emission control systems are certified as described below for light-duty trucks:

Fuel Type: Gasoline

Engine Family: SSK1.61JGDHA Displacement: 1.6 Liters (97 Cubic Inches)

Exhaust Emission Control Systems & Special Features:

Sequential Multiport Fuel Injection  
Heated Oxygen Sensor  
Three Way Catalytic Converter  
Exhaust Gas Recirculation

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The certification exhaust emission standards for this engine family in grams per mile are:

<u>Loaded Vehicle Weight(lbs.)</u>	<u>Miles</u>	<u>Non-Methane Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>
0-3750	50,000	0.25	3.4	0.4
	100,000	0.31	4.2	n/a

The certification exhaust emission values for this engine family in grams per mile are:

<u>Loaded Vehicle Weight(lbs.)</u>	<u>Miles</u>	<u>Non-Methane Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>
0-3750	50,000	0.10	1.5	0.1
	100,000	0.10	1.6	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average non-methane organic gas (NMOG) exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles".

BE IT FURTHER RESOLVED: That under the submitted compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the listed vehicle models are certified to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles at the request of the manufacturer based on the assumption that those standards and test procedures in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles" will be amended with the result that the data submitted by the manufacturer for the listed vehicle models would be sufficient to satisfy the requirements applicable to 1995 and subsequent model-year vehicles. The Air Resources Board approved such amendments at a hearing conducted on February 10, 1994. The certification of the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles is CONDITIONAL on such amendments becoming effective by January 31, 1995. If such amendments do not become effective by January 31, 1995, the listed vehicle models shall be deemed certified to the 50,000-mile evaporative emission standards applicable to 1980 through 1994 model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles" unless the manufacturer demonstrates, to the Executive Officer's satisfaction, that the listed vehicle models comply with the requirements for running loss and useful life standards and test procedures in effect on the date of this certification order.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles".

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System for 1988 and Subsequent Model-Year Passenger Cars, Light-duty Trucks, and Medium-Duty Vehicles with Three-Way Catalyst Systems and Feedback Control" (Title 13, California Code of Regulations, Section 1968) for the aforementioned model year.

BE IT FURTHER RESOLVED: That the listed vehicle models have been exempted from compliance with the "Malfunction and Diagnostic System Requirements-1994 and Subsequent Model-Year Passenger Cars, Light-duty Trucks, and Medium-Duty Vehicles and Engines" pursuant to Title 13, California Code of Regulations, Section 1968.1(m)(2.0) for the aforementioned model year.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).


BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

This Executive Order cancels and replaces Executive Order A-259-44-B issued September 1, 1994.

Executed at El Monte, California this 8th day of September, 1994.

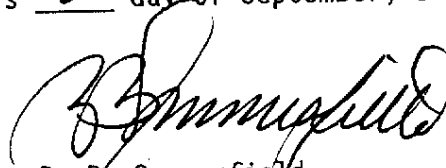

R. B. Summerfield  
Assistant Division Chief  
Mobile Source Division

1995 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

*CORPORATION*

Manufacturer: SUZUKI MOTOR ~~VEHICLE~~ Exh Engine Family: SSK1.61JGDHA  
 Evap Std: 50K \_\_\_ Useful Life with R/L X Evap Engine Family: SSK1089BYM11  
 Exh Std: Tier-0 \_\_\_ Tier-1 X TLEV \_\_\_ LEV \_\_\_ ULEV \_\_\_ ZEV \_\_\_ ; EPA TIER-0 \_\_\_ TIER-1 X  
 Veh Class(es): PC \_\_\_ LDT1 X LDT2 \_\_\_ MDV1 \_\_\_ MDV2 \_\_\_ MDV3 \_\_\_ MDV4 \_\_\_ MDV5 \_\_\_  
 Single Cert Std for Multi-Class Eng Fam: \_\_\_ (specify : N/A, LDT1, MDV1, MDV2, MDV3, MDV4)  
 Exh Cert Fuel(S) : Indo \_\_\_ Ph2 X Diesel :13 CCR 2282 \_\_\_ or 40CFR 86.113-90 \_\_\_ or -94 \_\_\_  
 M85 \_\_\_ CNG \_\_\_ LPG \_\_\_ Other (specify) \_\_\_  
 Fuel Type (s) : Dedicated \_\_\_ Flex-Fuel \_\_\_ Dual-Fuel \_\_\_ Gasoline X Diesel \_\_\_ M85 \_\_\_  
 CNG \_\_\_ LNG \_\_\_ LPG \_\_\_ Other (specify) \_\_\_  
 Hybrid : Type A \_\_\_ B \_\_\_ C \_\_\_ APU Cycle (e.g., Otto, Diesel, Turbine) \_\_\_  
 Engine Configuration : 1.4 (in line) Displacement : 1.6 Liters 97 Cubic Inches  
 Engine : Front X Mid \_\_\_ Rear \_\_\_ Drive : FWD \_\_\_ RWD \_\_\_ 4WD-FT \_\_\_ 4WD-PT X  
 Exhaust ECS (eg., EGR, MFI, TC, CAC) : SFI/HO2S/TWC/EGR  
 (use abbreviations per SAE J1930 SEP91)

*OBD II Exempt*

Engine Code (also list CA/49ST/50ST)	Vehicle Models (see Page 21.13.1)	Trans.Type A-automatic M-manual	ETW or Test Wt	DPA or RLHP	Ignition (ECM/PCM) Part No.	EGR System Part No.	Catalytic Converter Part No.
STCAB (California)	Sidekick 4-door (4WD)	A4	3125	12.3	33920-70E2	18110-58B30	14150-60B10

Date Issued :  
Revisions :