

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-254-45  
Relating to Certification of New Motor Vehicles

HYUNDAI MOTOR COMPANY

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1997 model-year Hyundai Motor Company exhaust emission control systems are certified as described below for passenger cars:

Emission Standard Category: Transitional Low-Emission Vehicle (TLEV)

Fuel Type: Gasoline

Engine Family: VHY2.0VJG2FK Displacement: 2.0 Liters (121.1 Cubic Inches)

Exhaust Emission Control Systems and Special Features:

Heated Oxygen Sensors (two)  
Three Way Catalytic Converter  
Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The TLEV certification exhaust emission standards for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Organic Gas</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Formaldehyde</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.125	3.4	0.4	0.015	10.0
100,000	0.156	4.2	0.6	0.018	n/a

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.98

The certification exhaust emission values set forth for non-methane organic gas (NMOG) reflect application of a 0.98 RAF for 1997 model-year TLEVs. The TLEV certification exhaust emission values for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Organic Gas</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Formaldehyde</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.074	0.6	0.1	0.001	7.0
100,000	0.079	0.6	0.1	0.001	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles".

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles", and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles".

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That the manufacturer is certifying the listed vehicle models with a partially complying on-board diagnostic system for the aforementioned model year pursuant to Title 13, California Code of Regulations, Section 1968.1(m)(6.2) ("Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines").


BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 12<sup>th</sup> day of June 1996.

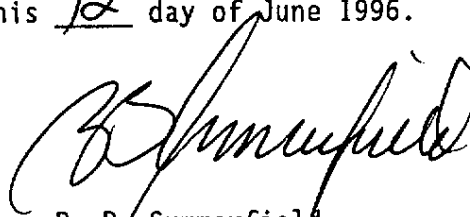

R. B. Summerfield  
Assistant Division Chief  
Mobile Source Division

1997 AIR RESOURCES SUPPLEMENTAL DATA SHEET  
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer : HYUNDAI MOTOR CO. Exh Eng Fam : VHY2.0VIG2FK Evap Fam : VHY1092BYM13  
 All Eng Codes in Eng Fam : CA X 49S     50S     AB965      
 Exh Std : CA Tier-1     TLEV X LEV     ULEV     ZEV     ; US EPA Tier-1      
 Evap Std : 50K Useful life with R/L X In-Use Exh Std : Full In Use X Alt In Use      
 Veh Class(es) : PC X LDT1     LDT2     MDV1     MDV2     MDV3     MDV4     MDV5      
 Single Cert Std for Multi. Class Eng Fam : N/A (specify : N/A, LDT1, MDV1, MDV2, MDV3)  
 Fuel Type(s) : Dedicated X Flex-Fuel     Dual-Fuel     Bi-Fuel     Gasoline X Diesel      
                   CNG     LNG     LPG     M85     Other (specify)      
 Emiss Test Fuel(s) : Indo X PH2     CNG     LPG     M85     Other (specify)      
                   Diesel : 13 CCR 2282     40 CFR 86.113-90     40 CFR 86.113-94      
 Service Accum : Std AMA X Mod AMA     Mfr ADV     OTHER (SPECIFY)      
 NMOG Test procedure : N/A     Std X Equip     R/L Test Proc : SHED X Pt Source      
 Hybrid : Type A     B     C    , APU Cycle (e.g., Otto, Diesel, Turbine)      
 Engine Configuration : I-4 Displacement : 2.0 /     Liters 121.1 /     Cubic Inches  
 Valves Per Cylinder : 4 Rated HP : 136 @ 6,000 RPM  
 Engine : Front X Mid     Rear     Drive : FWD X RWD     4WD-FT     4WD-PT      
 Exhaust ECS (e.g., MFI EGR., TC, CAC, : HO2S(2) + TWC+ SFI + OBD II  
 (use abbreviations per SAE J1930 SEP91 )

Eng. Code (also list CA/ 49ST/50ST)	Veh. Models (If coded see Attachment)	Trans. (M5-Man, L4-Auto)	ETW OR Test Wt	DPA or RLHP	Ignition (ECM/PCM) Part No.	EGR System Part No.	Catalytic Converter Part No.
ACM5-U /CM5-U(CA)	TIBURON (Coupe)	M5	3000	7.4	39110-23910 (9 030 930 020)	N/A	28950-23400 (H4II18)
ACL4-U /CL4-U(CA)	↑	L4	↑	7.0	↑	↑	↑

Issued : 5-1-96  
Revised :