

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
<p>Specifications that follow are minimum basic requirements. Bidder must list any deviations from these specifications. If bidder claims item "Meets or Exceeds" specifications, documentation must be provided with bid to substantiate claim. Failure to do so will result in rejection of your bid and/or product for non-compliance.</p>	
<p>2006 or newer conventional school bus capable of supporting the specified 7800 body in a proper and safe manner. Blue Bird BBCV 3310 model chassis or equal.</p> <p>Bidder must be a valid franchised dealer for units bid.</p> <p>Vehicles bid shall meet all current FMVSS and State standards for school buses.</p>	<p>YEAR: 2006 or newer CHASSIS MFG: Blue Bird MODEL: 3310 BODY MFG: Blue Bird MODEL: BBCV CAPACITY: 54</p>
<p>VEHICLE DIMENSIONS: G.V.W.R. - 33,000 lbs minimum. Wheelbase shall not exceed 273". Overall length (including bumpers) 470". Overall height 124" maximum. Overall width 96" (excluding mirrors). Headroom 76" minimum.</p>	<p>G.V.W.R.: 33,000# WHEELBASE: 273" BODY LENGTH: 406" OVERALL LENGTH: 470" OVERALL HEIGHT: 124" OVERALL WIDTH: 96" HEADROOM: 76"</p>
<p>AXLES: Front - 12,000 lbs. With oil lubed bearings. Include Hubcaps w/ window seals. Rear - 21,000 lbs. Single speed with 5.29 ratio. With petroleum lubed bearings.</p>	COMPLY
<p>BRAKES - SERVICE: Dual, full air system. 15.2 CFM gear driven air compressor. Provide an automatic reservoir drain valve on wet tank. Provide automatic slack adjusters, front and rear, and a Bendix AD-9 air dryer.</p> <p>Front - Brake Q-Plus lining 15" X 5". Rear - Brake Q-Plus lining 16.5" X 7".</p>	COMPLY
<p>BRAKES - EMERGENCY/PARKING: Internal expanding, transmission mounted, 9" diameter x 3" wide. Mechanical operating with hand control application at driver's left.</p>	COMPLY
<p>BUMPERS: Front - Smooth, one piece, 1/4" thick steel plate. Rear - 3/16" thick steel plate. 14" wrap around at corners with double "A" frame bracing. Front & Rear bumpers are die-formed, 12" high with 90-degree flanges, top and bottom.</p>	COMPLY
<p>CONTROLS - DRIVER'S AREA:</p> <ol style="list-style-type: none"> a. Electronic operated Throttle. b. Air brake pedal. c. Key type starter and stop switch. d. Headlight switch with rheostat dimmer for instrument lights. e. Headlight dimmer switch. f. Hazard signal switch. g. Directional signal switch. h. Driver switch panel located left side below driver window for easy access. Switches to be rocker design. Backlit design. i. Hand applied Parking brake valve with warning light. j. Entrance door control. k. Transmission selector. 	COMPLY

**54 PAX
BBCV**

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
<p>COOLING SYSTEM: Charge air and down-flow radiator mounted in tandem at vehicle front. Largest available from manufacturer. 24" diameter nylon cooling fan with nine (9) blades equipped with a "Fully-On" or "Fully-Off" electromagnetic fan clutch driven by polyvee fan belt with spring loaded tensioner. Fan controlled by Engine ECM.</p>	COMPLY
<p>DRIVELINE: Spicer SPL series with protective guard around shaft with lubed for life components 3½" diameter shaft.</p>	COMPLY
<p>ELECTRICAL SYSTEM: Alternator - 12 volt 175 amp HI-output Leece Neville or equal. Battery - Three (3) 12 volt, Group. 31, 2850 CCA combined. Battery to be mounted on slide-out tray in skirt compartment with key lock. Body wiring is color and number coded throughout. Wiring is protected by automatic re-setting circuit breakers (directional/hazard circuit may be fused). Exterior electrical access below driver's window with outside latch with a keyed lock. Multiplex chassis wiring with LED readout in drivers dash area.</p>	COMPLY
<p>ENGINE: Cat C7, 190 Horsepower @ 2200 PRM; 520 ft. lb. of torque @ 1400 RPM; 800 RPM idle. Include fully "off" fully "on" electric fan clutch and primer pump.</p>	COMPLY
<p>EXHAUST SYSTEM: 4" O.D. 16 gauge aluminized steel tubing from engine turbo-charge to in line muffler. Stainless steel muffler with catalytic converter. 4" O.D. 16 gauge aluminized steel tailpipe. Wide band exhaust clamps used at all joints. Tailpipe to exit through rear bumper.</p>	COMPLY
<p>FILTERS: Oil filter - Full flow disposable. Air filter - Dry type. Primary fuel filter/water separator Racor 690R30 or equal. Secondary Fuel filter - Mounted on engine, supplied by engine manufacturer.</p>	COMPLY
<p>FUEL TANK: 60-gallon fuel capacity with fuel filler door and sender inspection plate.</p>	COMPLY
<p>HORN: Dual electric with non-glare horn button emblem.</p>	COMPLY
<p>INSTRUMENTS AND GAUGES - DRIVER'S AREA: a. Speedometer with English Major and Metric Minor b. Seven digit odometer. c. Resettable trip odometer. d. Voltmeter. e. Fuel level. f. Oil pressure. g. Coolant temperature. h. Front and rear air pressure gauge. i. Low pressure warning light and buzzer for dual air brake system. j. High beam indicator. k. Right and left directional indicators. l. Engine warning light and buzzer for low oil pressure/high engine temperature.</p>	COMPLY

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
<p>SHOCK ABSORBERS: Two front and two rear.</p>	COMPLY
<p>STEERING: Full power Ross TAS-55 integral unit with 20.4 to 1 ratio. 18" diameter, two-spoke, padded tilt telescoping steering column.</p>	COMPLY
<p>SUSPENSION: Front - 10,000 lb. Capacity. Hendrickson "Softek" variable rate, tapered springs with Anti-Wear liner with maintenance free rubber bushings. Rear - 21,000 lb. Capacity. 3" wide, 2-stage, flat leaf springs (2), variable rate with maintenance free, rubber bushed radius leaf permitting axle adjustments for dog tracking.</p>	COMPLY
<p>TIRES: Six (6) Michelin 11R 22.5 G tubeless XZE LRH.</p>	COMPLY
<p>TRANSMISSION: Allison 2500 PTS Series automatic transmission with Transynd fluid.</p>	COMPLY
<p>VALVES: Brass gate valves to isolate coolant circulation to heaters from engine.</p>	COMPLY
<p>WHEELS: Six (6) 22.5" X 8.25", 10 stud hub pilot disc, single front, dual rear.</p>	COMPLY
<p>CONSTRUCTION: Body parts must be rustproofed after fabrication and before assembly.</p> <p>Floor panels shall be 14 gauge steel, welded and riveted at each joint with 1/8" steel backing bar and 3/16" angle iron reinforcement. The main floor cross members shall be full width of floor.</p> <p>14 gauge hat-shaped body bows one piece from floor line on one side to floor line on other side. Bows shall end upon floor for maximum rollover strength. Bows shall not extend below floor level.</p> <p>Body sheet metal shall be fastened with buck rivets on exterior and blind rivets on interior. Sheet metal screws not acceptable.</p> <p>20 gauge exterior side panels shall be one piece from windowsills to bottom of skirt.</p> <p>Four protective rub rails at window level, seat level, near floor level and bottom of skirt. Riveted to body.</p> <p>Interior side panels shall be aluminized from windowsill to top of seat rail with mar-resistant finish.</p> <p>One-piece roof panels from window top on one side to window top on other side for maximum strength. Spliced roof sheet not acceptable. Rain visors to be embossed in roof panels over each window.</p>	COMPLY

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
<p>EMERGENCY EXITS: Rear and left side emergency doors. Retainers to keep exit doors open shall be provided. Include header pads. Rear door shall have upper and lower glass.</p>	COMPLY
<p>ENTRANCE DOOR: Manual operated, outward opening entrance door. Include header pad.</p>	COMPLY
<p>FLOOR COVERING: 1/2" plywood over 14-gauge steel, screwed down. Black rubber floor, smooth under seats and ribbed in aisle and entrance steps. Steps shall have white nosing. Include aluminum aisle trim over joint in floor covering. Molded rubber covers required over rear interior wheel housings.</p>	COMPLY
<p>GLASS: Windshield - AS-1 tinted, non-glare, four piece flat safety glass 2.200 square inches. Side Windows - 12" split sash in aluminum frames. All glass to be tempered, tinted to allow 30% light transmission. Drivers Window and Entrance door - All glass to be laminated, tinted to allow 70% light transmission</p>	COMPLY
<p>HEATER AND DEFROSTER: a. 90,000 BTU front heater and defroster. b. One (1) 6" auxiliary defroster fans. c. Goodyear Hi-Miler heater hoses with constant torque clamps. d.</p>	COMPLY
<p>INSULATION: Body to be insulated with 1-1/2" of fiberglass in roof, roof bows, sides and ends. Provide perforated headlining in driver's and first section. Second section rearward to be solid headlining panels, spanning the entire width of the bus.</p>	COMPLY
<p>LIGHTING: a. Sealed beam Halogen headlights. b. Two combination stop/tail lights; 4" right and left rear license panel stop/tail lights in combination with 7" stop/tail lights with clear red lens. c. 7" rear amber directional lights. d. Fender mounted directional lights. e. Eight lamp warning system with hoods. f. 5" back-up lights. g. Clearance, cluster and side marker lights. h. Daytime running lights. i. Two rows of dome lights on separate switches for front half and rear half of rows. j. Driver's dome light. k. Stepwell light. l. Required reflectors. m. Specialty Mfg. electric operated stop arm with reflectorized blade and flashing incandescent lights. n. All other lighting required to meet California standards.</p>	COMPLY

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
MIRRORS: Interior - 6" X 30". Exterior - Mirrors shall conform to FMVSS 111. Rosco "Avia" 9" x 17" mirrors with index brackets (wrench free adjustment), flat and convex in a single frame, mounted to provide driver maximum view, include Rosco "Hawkeye" 10.8" x 12.5" elliptical crossview mirror with tinted band.	COMPLY
MUD FLAPS: Behind front and rear wheels.	COMPLY
PAINT AND LETTERING: Exterior - Yellow. Roof - White. Rub Rails - Black. Interior - White. Wheels - Black. Bumpers - Black. All exterior body paint to be polyurethane. Lettering to California standards, supplied to vendor after award of bid to include district name, CA number and bus number.	COMPLY
SAFETY EQUIPMENT: a. 24 unit first aid kit. b. 10 BC fire extinguisher. c. Triangle warning devices in container. d. 6" X 30" sun visor. e. CHP certificate holder. f. Back-up alarm with 112 db. g. Hand held stop sign and bag type holder.	COMPLY
SEATS (Passenger): 45" LH & 30" RH seats, designed and installed to meet all requirements of FMVSS 222. Gray vinyl upholstery. Clear aisle at side emergency door. All passenger seats shall have 3pt belts as required by California law. Safety barriers with offset legs required in front of right and left front seats, upholstered to match seats. Provide aluminized modesty panel under right barrier.	COMPLY
SEATS (Driver's): National driver's seat, NS 2000 pedestal certified per FMVSS 222. Seat shall have a 4" manual height adjustment, 6" fore & aft slides, recline angle infinitely adjustable, 2 position front cushion, mechanical lumbar adjustment. Charcoal Morbern Mor-Dura III MD-120 fabric seating surface. Include driver's 3pt. Single bar lock seat belt.	COMPLY
STEPWELL: Three (3) step stainless steel entrance angled toward center aisle with rubber covered steps to meet National Standards. A handrail shall be installed at rear (left side) of stepwell.	COMPLY
UNDERCOATING: Body shall be fully undercoated under floor, skirt panels and wheel wells prior to mounting on chassis.	COMPLY

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
VENTILATION: Static non-closing vent installed in forward body section on roof. Two (2) Specialty full pop-up roof vent/emergency exits shall be provided with exterior release.	COMPLY
WINDSHIELD WIPERS: Two-speed electric operated wipers bottom mounted. One-gallon plastic windshield washer reservoir.	COMPLY
WARRANTY: Enclose a copy of bus manufacturer's limited warranty. <ol style="list-style-type: none"> 1. Five (5) years or 100,000 miles: <ol style="list-style-type: none"> a. Chassis frame and Cross members. b. Body shell - floor, side walls, roof, front and rear sections, including rust-through. c. Interior and exterior body paint adhesion. d. School bus seat and barrier frames. 2. Four (4) years or 50,000 miles: <ol style="list-style-type: none"> a. Front axle assembly, including king pins, I-beam, bushings, spindles, excluding brakes and wheel ends. b. Rear axle assembly and differential, excluding brakes and wheel ends. 3. Two (2) years or 24,000 miles: <ol style="list-style-type: none"> a. Suspension excluding pins and bushings. b. Driveshafts, support bearings and universal joints. 4. Twelve (12) months or 12,000 miles: <ol style="list-style-type: none"> a. All original components not covered above, except diesel engines and automatic transmissions, wheelchair lifts, air conditioners, tires, and batteries, which are covered by their manufacturers. 5. Five (5) years unlimited miles or 6,000 operating hours: <ol style="list-style-type: none"> a. Caterpillar engine standard limited warranty. 6. Three (3) years 100,000 miles: <ol style="list-style-type: none"> a. Allison transmission standard limited warranty. 	See manufacturer's standard warranty enclosed
ADDITIONAL AVAILABLE OPTIONS:	
1.) Engine, Caterpillar C7, 210 horsepower and 520 lb ft. torque	Add \$ 1280.00
2.) Engine, Caterpillar C7, 230 horsepower and 540 lb ft. torque	Add \$ 2433.00

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
3.) Engine, Caterpillar C7, 230 horsepower and 660 lb Ft. torque Add \$ (Requires Option 4.) Allison 3000 PTS transmission)	3249.00
4.) Transmission, Allison 3000 PTS transmission in lieu of Std 2500 PTS automatic transmission Add \$ (Requires Option 3.) 230hp/660 ft lb Cat engine)	4533.00
5.) Rear Air Ride Suspension Add \$	1424.00
6.) Front Air Ride Suspension Add \$ (Requires Option 5.) Rear air ride suspension)	1625.00
7.) Electric air drains Add \$	748.00
8.) 1500W internal engine block heater Add \$	112.00
9.) Dust shields Front & Rear Add \$	44.00
10.) Hydraulic brakes ILO Air brakes Deduct \$ (Maximum GVWR 30,000#)	(1416.00)
11.) Pac exhaust brake Add \$	925.00
12.) Compressor, Pac exhaust brake Add \$ (Required with Hydraulic brakes & Option 11)	427.00
13.) Silicone heater hoses w/CT clamps ILO Std Add \$	122.00
14.) 270 amp LN, internally regulated alternator ILO Std Add \$	630.00
15.) (2) 8D batteries ILO Std Add \$	198.00
16.) Battery disconnect switch Add \$	127.00
17.) 100 gallon fuel capacity ILO Std Add \$ (Available on 252", 273" wheelbases only)	673.00
18.) Transmission temperature gauge Add \$	51.00
19.) Ammeter Add \$	66.00
20.) 5/8" Marine Plywood ILO Std Add \$	357.00
21.) Tan/Green/Blue/Dark Gray rubber flooring ILO Std Black Add \$	260.00
22.) Specialty Pro-Lo roof vent (2) ILO Std Add \$	110.00
23.) 80K BTU rear heater Add \$	469.00

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION		BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
24.) Heavy duty heater pump	Add \$	290.00
25.) Acoustic headlining full length	Add \$	518.00
26.) Sound deadening spray	Add \$	46.00
27.) 16 Ga. Extended side panels ILO 20 Ga. Std	Add \$	250.00
28.) 255/70R tires ILO 11R tires (Requires Option 57a.) Flat floor (Requires Option 5.) Rear air ride suspension)	Add \$	42.00
29.) Aluminum wheels ILO steel wheels	Add \$	1780.00
30.) Yellow wheels ILO Std	Add \$	41.00
31.) Locking Driver's compartment above windshield	Add \$	251.00
32.) Vandal Locks:		
32a.) Side emergency exit	Add \$	83.00
32b.) Rear emergency exit	Add \$	163.00
33.) Air operated entrance door ILO Manual	Add \$	250.00
34.) Electric operated entrance door ILO Manual	Add \$	639.00
35.) Safety lock front entrance door	Add \$	54.00
36.) 2 pc. tint/shaded windshield ILO Std	Add \$	37.00
37.) Rubber fenders - rear	Add \$	290.00
38.) Heated mirrors ILO Std	Add \$	259.00
39.) Heated/Remote mirrors ILO Std	Add \$	530.00
40.) 6" center mounted auxiliary fan	Add \$	52.00
41.) Am/Fm/CD/PA radio w/8 speakers	Add \$	558.00
42.) Driver's Seats::		
42a.) National Air drivers seat	Add \$	137.00
42b.) Bostrom Routemaster Air drivers seat	Add \$	121.00
42c.) Bostrom Routemaster Manual drivers seat	Add \$	No charge
42d.) Magnum 200 Manual drivers seat	Add \$	801.00
43.) Proform II Fireblock upholstery ILO Std	Add \$	617.00
44.) Brown/Black/Blue/Burgundy/Green Upholstery ILO Standard Gray	Add \$	Brown & Gray - No charge Blk/Blue/Burg/Grn - Add option 4

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
45.) LH modesty panel under barrier	Add \$ 13.00
46.) Flip seat ILO Barrier @ SED	Add \$ TBD
47.) Student Safety Seats w/3 pt belts: 47a.) 30" each 47b.) 36" each (*This option will change the bus capacity - to be determined at time of order)	Add \$ 357.00 Add \$ 380.00
48.) Student safety seats w/3 pt belts <u>with</u> child restraint positions: 48 a.) 30" 48 b.) 39" 48c.) 45"	Each Add \$ 578.00 Each Add \$ Not available Each Add \$ 823.00
49.) 3M reflective tape sides and rear of bus in addition to Std	Add \$ 142.00
50.) LED Lights: 50a.) LED tail and brake lights 50b.) LED directional lights front & rear 50c.) LED directional lights, sides 50d.) LED clearance/marker 50e.) LED backup 50f.) LED 8-way warning 50g.) LED stop arm	Add \$ 427.00 Add \$ 455.00 Add \$ 37.00 Add \$ 204.00 Add \$ 176.00 Add \$ 1269.00 Add \$ 269.00
51.) Strobe light w/pilot	Add \$ 154.00
52.) Interior parcel racks	Add \$ 1312.00
53.) Luggage Compartments: 53a.) LH single compartment w/lights 52b.) RH single compartment w/lights 52c.) LH double compartment w/lights 52d.) RH double compartment w/lights	Add \$ N/A Add \$ 470.00 Add \$ 692.00 Add \$ 764.00
54.) Fog lights in front bumper	Add \$ 408.00
55.) Air Conditioning: 55a.) Blue Bird "Comfort Aire" Freeblow *120K BTU on models shorter than 34 feet *134K BTU on models longer than 35 feet (Requires Option 14.) 270 amp alternator Requires Option 34.) Electric entrance door 55b.) Blue Bird "Comfort Aire" Ducted *120K BTU on models shorter than 34 feet 134K BTU on models longer than 35 feet (Requires Option 14.) 270 amp alternator (Requires Option 34.) Electric entrance door	See attached for additional available air conditioning options Add \$ 8228.00 Add \$ 8818.00
56.) Extended 5yr warranty	Add \$ 2029.00

AIR CONDITIONING OPTIONS

55.) AIR CONDITIONING:

<u>FREEBLOW</u>	55a1.)	TransAir 100K BTU freeblow skirt condensers Caterpillar	ADD \$ 7,644.00
	55a2.)	TransAir 100K BTU freeblow roof condensers Caterpillar	ADD \$ 10,462.00
	55a3.)	Carrier 110K BTU freeblow skirt condensers Caterpillar	ADD \$ 7,568.00
	55a4.)	Carrier 110K BTU freeblow roof condensers Caterpillar	ADD \$ 9,015.00
<u>DUCTED</u>	55b1.)	TransAir 100K BTU ducted skirt condensers N/A with wheelchair options Caterpillar	ADD \$ 9,588.00
	55b2.)	TransAir 100K BTU ducted roof condensers N/A with wheelchair options Caterpillar	ADD \$ 12,420.00
	55b3.)	Carrier 110K BTU ducted skirt condensers Caterpillar	ADD \$ 9,163.00
	55b4.)	Carrier 110K BTU ducted roof condensers Caterpillar	ADD \$ 10,610.00

*All A/C options are subject to compatability.

54-PASSENGER CONVENTIONAL SCHOOL BUS

SPECIFICATION	BIDDER'S RESPONSE - MUST COMPLY OR STATE DEVIATIONS IN FULL
57.) Engine Software: 57a.) Caterpillar engine software & cable 57b.) Lap top computer for engine/trans diagnostics	Add \$ 2420.00 Add \$ 1870.00
58.) Wheelbase Options: 58a.) 189" - 23'11" body 58b.) 217" - 26'10" body 58c.) 238" - 28'07" body 58d.) 252" - 30'11" body 58e.) 273" - 33'03" body	Deduct \$ (5313.00) Deduct \$ (3709.00) Deduct \$ (3165.00) Deduct \$ (1890.00) Deduct \$ (676.00)
59.) Special Needs Equipment: 59a.) Flat floor without rear wheel housings (Requires Option 5. Rear air ride suspension and Requires Option 28. 255/70R Low profile tires) 59b.) Lift door & Braun W/C lift & pad kit 59c.) Lift door & Ricon W/C lift & pad kit 59d.) Lift door & Maxon W/C lift & pad kit 59e.) Wheelchair position, L-Track 59f.) Wheelchair tracks, LH 59g.) Wheelchair tracks, RH 59h.) Q-Straint QRT retractable W/C tiedowns (Includes Lap & Shoulder belts) 59i.) Surelok Retractable W/C tiedowns (Includes Lap & Shoulder belts)	Add \$ 37.00 Add \$ 5012.00 Add \$ 4837.00 Add \$ 5159.00 Each Add \$ 612.00 Add \$ Models 2311-2610 \$2025.00 ea. sic Add \$ Models 2807-3303 \$2726.00 ea. sic Each set-Add \$ 337.00 each set Each set-Add \$ 416.00 each set
60.) Monthly Rental/Lease Options: 60a.) Monthly payment - 1 year minimum 60b.) Monthly payment - 2 year minimum 60c.) Monthly payment - 3 year minimum	\$ 1650.00 \$ 1500.00 \$ 1300.00

61.) Cummins ISB 230 horsepower diesel engine ILO STD ADD \$ 1283.00
 *Requires Allison 2500 PTS transmission

62.) Cummins ISB 245 horsepower diesel engine ILO STD Add \$ 1524.00
 *Requires Option 4.) Allison 3000PTS transmission

*All options subject to compatability.

California

PLBT: BBCV




Length: 3310
Wheelbase:
273.000

Usage: School
Bus

Body Plan #
5001525

Seat Plan #
2562

Capacity: 54

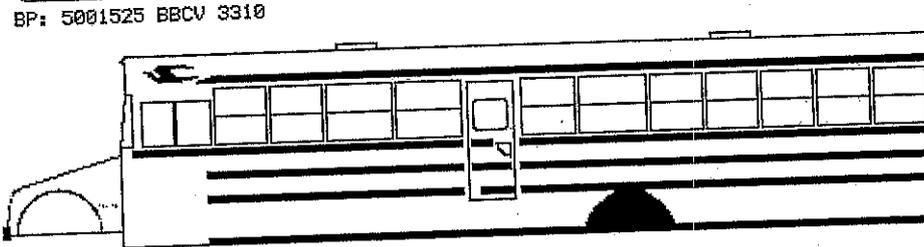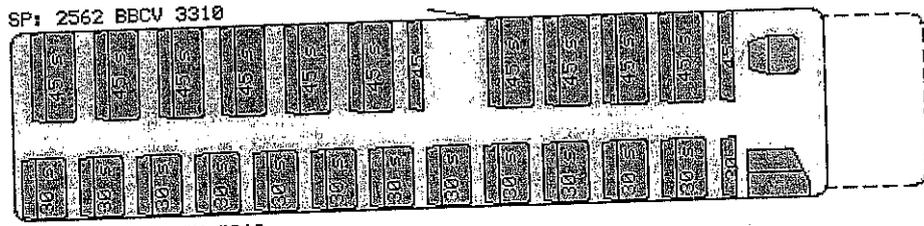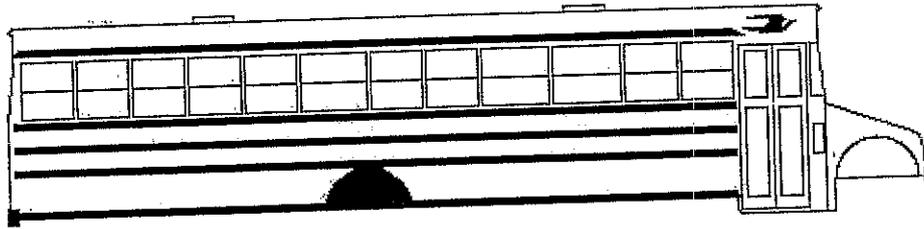

Seat Plan
data

SP Description: "BBCV3310 CEW SS 45 30"
BP Description: "BBCV3310 77HR"


BID FORM

Date: 11/22/05
Bidder: A-Z Bus Sales, Inc.

To The Governing Board

School: Waterford Unified School District
Address: 12420 Bentley Street
Waterford, Ca. 95386

The undersigned fully understands that the District forms a contract upon acceptance of this bid. The undersigned, having carefully read the Notice To Bidders as published on November 15, 2005 and November 22, 2005, and the Specifications, hereby proposes to furnish in strict conformity with said documents the following items:
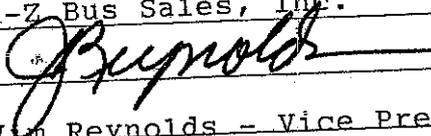
<u>Quantity</u>	<u>Description</u>
<u>One or more</u>	<u>Blue Bird BBCV 3310</u>
	<u>54 passenger</u>
<u>Cost (excluding Sales Tax)</u>	<u>\$ 73,833.00 each + sales tax</u>
<u>Estimated Delivery Date:</u>	<u>180 days after receipt of order</u>
<u>Name of Bidder:</u>	<u>A-Z Bus Sales, Inc.</u>
<u>Signed by:</u>	<u></u>
<u>Title:</u>	<u>Jim Reynolds - Vice President & General Manager</u>
<u>Address:</u>	<u>1900 S. Riverside Avenue</u>
	<u>Colton, Ca. 92324</u>
<u>Telephone:</u>	<u>951-781-7188</u>
<u>Fax:</u>	<u>951-781-9806</u>

*Additional manufacturer's concessions may be available at time of order from 5-10%.

NOTE: Pursuant to Public Contract Code Sections 20118 and 20652, the Bidding Agency may allow other public agencies in the State Of California (including but not limited to: Orange, San Diego, Riverside, Los Angeles, Monterey, Fresno and Santa Barbara counties) to purchase equipment and supplies under the same terms and conditions. The Bidding Agency waives its rights to require other districts to draw their warrants in favor to this district and authorizes each district to make payment directly to the successful bidder. The Bidding Agency agrees to waive payment of reasonable costs per Public Contract Code Section 20118. We understand the District reserves the right to reject any and all bids, and to waive any irregularity of informalities in any bids or in the bidding.