

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER D-201
Relating to Exemptions Under Section 27156
of the Vehicle Code

ENICAR INTERNATIONAL, INC.
"LIFT FUEL EFFICIENCY SYSTEM"

WHEREAS, Vehicle Code Section 27156 and Title 13 California Code of Regulations (hereafter "CCR") Section 2222(e), authorize the California Air Resources Board (ARB) and its Executive Officer to exempt add-on and modified parts from the prohibitions of Vehicle Code Section 27156.

WHEREAS, Enicar International, Inc. has applied to the ARB for exemption from the prohibitions of Vehicle Code Section 27156 for the "Lift Fuel Efficiency System".

WHEREAS, pursuant to the authority vested in the Executive Officer by Health and Safety Code Section 39515 and in the Chief, Mobile Source Division by Health and Safety Code Section 39516 and Executive Order G-45-5, the Air Resources Board finds:

1. The "Lift Fuel Efficiency System" is an add-on device that is connected to the PCV system in a motor vehicle.
2. The PCV system is part of the required motor vehicle pollution control system.
3. This device consists of a plastic bottle, rubber hose, plastic tee for connection into the PCV system, mounting brackets, and bottle cap with vapor outlet port incorporating a 0.022 inch diameter orifice (Identified by Part No. B-1) and air inlet port. The composition of the fluid is identified by Kem Krest Fluid Specification No. 1072.
4. The "Lift Fuel Efficiency System" by being installed with the PCV system alters the original design of a motor vehicle pollution control system.
5. The "Lift Fuel Efficiency System" is a device subject to the prohibitions of Vehicle Code Section 27156 and an add-on part as defined by 13 CCR Section 1900(b)(1).
6. The "Lift Fuel Efficiency System" does not reduce the effectiveness of any required motor vehicle pollution control device.
7. The Air Resources Board, in the exercise of technical judgement, is aware of no basis on which the "Lift Fuel Efficiency System" will provide an increase in fuel economy.

8. It has not been determined what effect use of the "Lift Fuel Efficiency System" may have on any warranty, either expressed or implied, by the manufacturer of a motor vehicle on which the device is installed.
9. The "Lift Fuel Efficiency System" is not a certified motor vehicle pollution control device pursuant to Health and Safety Code Section 43644.
10. The Air Resources Board by granting an exemption to Enicar International, Inc. for the "Lift Fuel Efficiency System" does not recommend or endorse in any way the "Lift Fuel Efficiency System" for emissions reduction, fuel economy, or any other purpose.

IT IS HEREBY RESOLVED that the "Lift Fuel Efficiency System" is exempt from the prohibitions of Vehicle Code Section 27156 for installation on 1990 and earlier model-year vehicles powered with gasoline internal combustion engines subject to the following conditions:

1. This exemption shall not apply to any device, apparatus, or mechanism advertised, offered for sale or sold with, or installed on, a motor vehicle prior to or concurrent with transfer to an ultimate purchaser.
2. No changes are permitted to the device as described in the application for exemption. Any changes to the device, applicable model year, or other factors addressed in this order must be evaluated and approved by the Air Resources Board prior to marketing in California.
3. Marketing of this device using an identification other than that shown in this Executive Order or marketing of this device for an application other than those listed in the Executive Order shall be prohibited unless prior approval is obtained from the Air Resources Board. Exemption of this product shall not be construed as an exemption to sell, offer for sale, or advertise any component of the product as an individual device.
4. Any oral or written references to this Executive Order or its content by Enicar International, Inc., its principals, agents, employees, distributors, dealers, or other representatives must include the disclaimer that the Executive Order or the exemption it provides is not an endorsement or approval of any fuel economy or emissions reduction claims for the "Lift Fuel Efficiency System" and is only a finding that the device is exempt from the prohibitions of Vehicle Code Section 27156.
5. This Executive Order is valid provided that installation instructions for this device will not recommend tuning the vehicle to specifications different from those submitted by the device manufacturer.

6. No claim of any kind, such as "Approved by the Air Resources Board" may be made with respect to the action taken herein in any advertising or other oral or written communication.

Violation of any of the above conditions shall be grounds for revocation of this order. The order may be revoked only after ten day written notice of intention to revoke the order, in which period the holder of the order may request in writing a hearing to contest the proposed revocation. If a hearing is requested, it shall be held within ten days of receipt of the request and the order may not be revoked until a determination after hearing that grounds for revocation exist.

Executed at El Monte, California, this 11th day of July, 1990.


R. B. Summerfield
Assistant Division Chief
Mobile Source Division

State of California
AIR RESOURCES BOARD

EVALUATION OF ENICAR INTERNATIONAL, INC. "LIFT FUEL EFFICIENCY SYSTEM"
FOR EXEMPTION FROM THE PROHIBITIONS OF VEHICLE CODE
SECTION 27156 IN ACCORDANCE WITH SECTION 2222, TITLE 13, OF THE
CALIFORNIA ADMINISTRATIVE CODE

July 1990

State of California
AIR RESOURCES BOARD

EVALUATION OF ENICAR INTERNATIONAL, INC. "LIFT FUEL EFFICIENCY SYSTEM"
FOR EXEMPTION FROM THE PROHIBITIONS OF VEHICLE CODE
SECTION 27156 IN ACCORDANCE WITH SECTION 2222, TITLE 13, OF THE
CALIFORNIA ADMINISTRATIVE CODE

by

Mobile Source Division
State of California
Air Resources Board
9528 Telstar Avenue
El Monte, CA 91731

(This report has been reviewed by the staff of the California Air Resources Board and approved for publication. Approval does not signify that the contents necessarily reflect the views and policies of the Air Resources Board, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.)

SUMMARY

Enicar International, Inc. of 1405 16th Street, P. O. Box 4638, Racine, WI 53404, has requested an update to Executive Order D-24-4 from the prohibitions of Vehicle Code Section (VC) 27156 for their "Lift Fuel Efficiency System". This device was under previous ownership by Lift, Inc. Enicar has requested that the exemption for this device which included 1976 and older model-year vehicles be updated to include 1990 and older model-year vehicles and to reflect the change of ownership.

The staff recommends adoption of Executive Order D-201 granting Enicar International, Inc. exemption for the "Lift Fuel Efficiency System" on 1990 and older model-year gasoline powered motor vehicles.

EVALUATION OF ENICAR INTERNATIONAL, INC. "LIFT FUEL EFFICIENCY SYSTEM"
FOR EXEMPTION FROM THE PROHIBITIONS OF VEHICLE CODE
SECTION 27156 IN ACCORDANCE WITH SECTION 2222, TITLE 13, OF THE
CALIFORNIA ADMINISTRATIVE CODE

I. INTRODUCTION

Lift, Inc. of Los Angeles, California has received an exemption from the prohibitions of Section 27156 of the Vehicle Code under Executive Order D-24-4 for its "Lift Fuel Efficiency System" vapor injector. Under this exemption, the device can be used in 1976 and older model-year vehicles. Enicar International, Inc. of Racine, Wisconsin acquired the rights to the "Lift Fuel Efficiency System". Enicar International, Inc. has requested that the exemption for the "Lift Fuel Efficiency System" be updated to include the 1990 and older model-year vehicles and to reflect a change in ownership. A description of the device, test data and other pertinent information in support of their application for this exemption is found in Appendix A. The applicant states that there is no change in the design of the original unit or its application.

II. CONCLUSIONS

The composition of the fluid used in the "Lift Fuel Efficiency System" has not changed and is identified as Kem Krest Specification Number 1072. Previous evaluation using the "Lift Fuel Efficiency System" with the proprietary fluid showed no adverse effect on emissions. The size of the outlet orifice, which is approximately 0.022 inches in diameter, has not changed. Based on previous testing and engineering evaluations of similar devices, the staff has found that orifices of 0.022 inches in diameter or less

will cause no adverse effect on emission. Therefore, although vehicles have undergone large technology changes, including emission control systems, the staff determined the device will not cause a significant increase in emissions as previously tested. The staff recommends no further testing be performed and concurs that the device will have no adverse impact on emissions of 1990 and older model-year vehicles.

III. RECOMMENDATION

The staff recommends the adoption of Executive Order D-201 granting Enicar International, Inc. exemption from the prohibition of Section 27156 of the California Vehicle Code for its "Lift Fuel Efficiency System" vapor injector applicable to 1990 and older model-year gasoline powered motor vehicles.

APPENDICIES

KEM KREST PRODUCTS COMPANY

24684 HATHAWAY • FARMINGTON, MICHIGAN 48024
AREA 313 • PHONE 477 5171

December 12, 1967

Mr. R.J. Kinney
AIR RESOURCES BOARD OF
CALIFORNIA
9528 Telear Avenue
El Monte, California 91731

Dear Mr. Kinney:

In confirmation of our phone conversation with Mr. George Lew, this date, we submit the formula for vapor injection devices for internal combustion engines. You currently know this fuel as California Specification Number 1072.

We were requested to supply this formula to your department by Mr. William Hariton of LIFT INC., Beverly Hills, California.

41.8%	IPA (99%)
10.0%	Butyl Cellosolve
8.4%	M.E.K.
8.3%	Xylene
20.9%	T S 150 and/or (HS1%)
9.0%	H ₂ O (Water-De-ionized)
* 0.79%	Tergitol 15-S-7
* 0.78%	Tergitol 15-S-9
0.03%	S.A.G. 470
	Dye to color standard
<hr/>	
100%	

*Special: Temperature of batch can vary this percentage slightly. Tergitol is added to clear cloudiness and "lock" formula together.

May we be of further service?

Cordially,

KEM KREST PRODUCTS COMPANY



A. J. Plattner
President

AJP/lsh
cc: Mr. George Lew




1

Mount Bracket. Find a convenient place under your car hood large enough to accommodate the LIFT unit. Drill two holes through two of the mounting holes in bracket and attach bracket firmly to side of engine compartment with two sheet-metal screws provided.

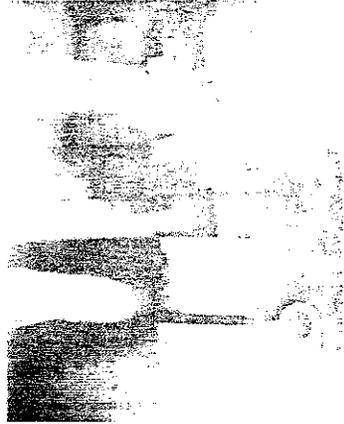

2

Install Cut-Washer. Remove shipping cap from LIFT Reservoir. Roll cut-washer (in plastic bag) down over base of bottle threads until it sits firmly at base of threads.

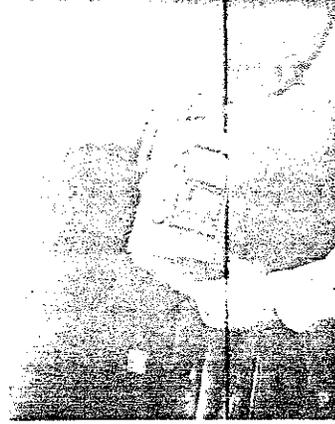

3

Insert Control Valve. Insert control valve on LIFT Unit. Make sure it seats firmly against cut-washer to eliminate any vacuum leaks. Now insert LIFT Fuel Reservoir into mounting bracket.




4

Connect hose to LIFT unit. Attach Unit's hose to LIFT control valve. Be sure it fits snugly on nozzle at top. Check for air leaks.

CAUTION: Make certain LIFT connecting hose does not touch air conditioning hoses or hot manifolds.

5

Lo
Lo
fr
di
(I
lo
bl
sic
re
Fo
—
en
pu
re
cc
In
to
va
be

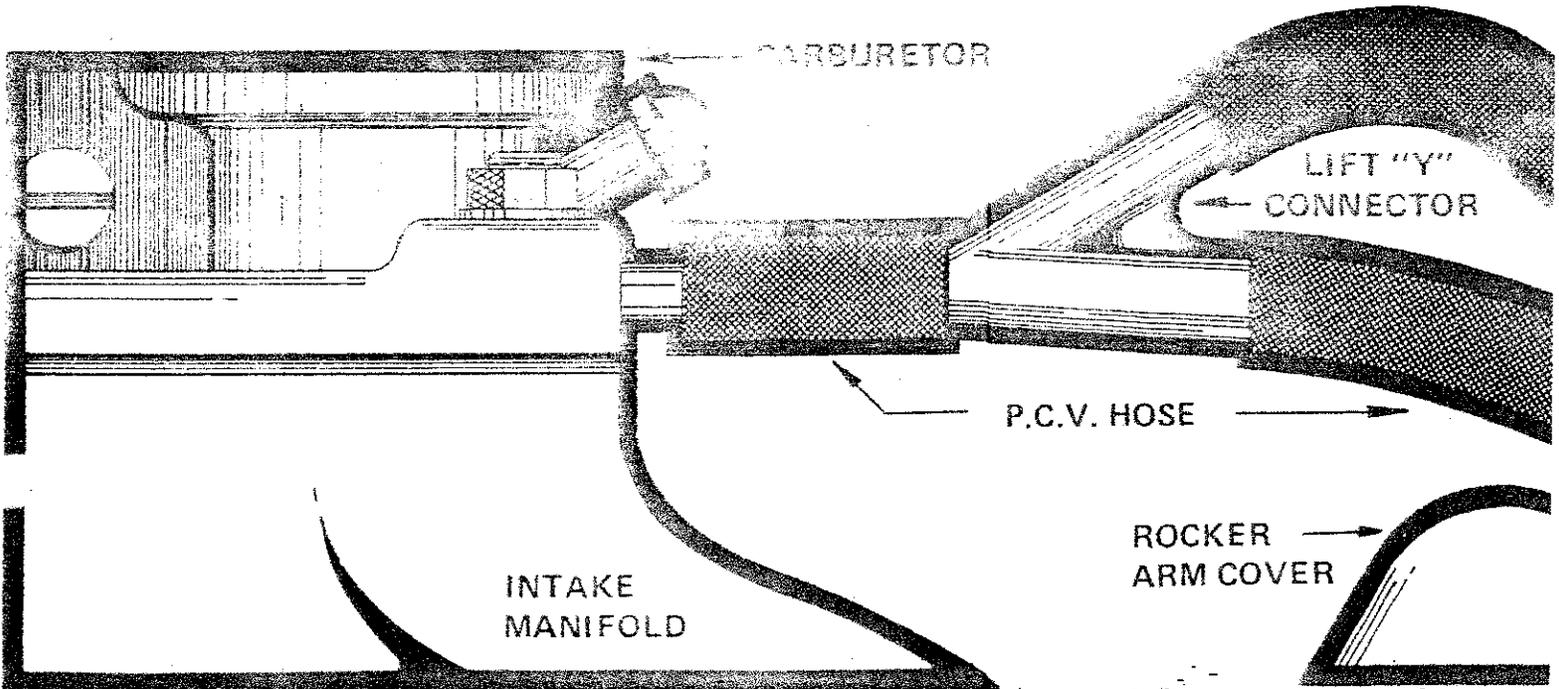



5

Locate pollution control valve. Locate PCV Hose running from the valve lifter cover directly to base of carburetor. (In some cars, PCV Hose is located in manifold on top of block; near oil fill cover; beside crank case; or on top-rear of valley cover.) **NOTE:** For proper PCV identification — check PCV Hose where it enters engine. Hose should pull out easily. Be certain to re-insert PCV Hose before continuing installation. In some cases, you may have to connect to another primary vacuum source running to the base of the carburetor.



6

Insert Connecting "Y". Trace PCV Hose to point where it enters carburetor. With sharp knife, cut PCV Hose as close to the base of the carburetor, as possible. (4" or less for best results.) Into cut, insert appropriate "Y" fitting. **NOTE:** Three "Y" fitting sizes are provided. Insert so leg "Y" points toward carburetor. Be sure both sides of PCV hose fit securely against "Y".


CAUTION: Never cut or install unit in brake line hose or gasoline line!



7

Attach LIFT hose. Take hose running from LIFT Fuel Control Valve and attach it tightly to branch of "Y" fitting you installed in PCV Hose. This completes LIFT hook-up installation.


SPECIAL NOTE: Do not install the LIFT "Y" connector into the primary vacuum line to which the charcoal canister line is connected.

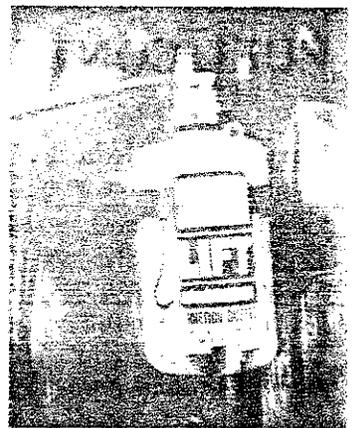

8

Start your engine. THEN CHECK ALL CONNECTIONS FOR VACUUM LEAKS. LIFT has a factory pre-set valve, so no adjustment is necessary.

SPECIAL NOTE: If for any reason the valve should be out of adjustment, to properly readjust: close valve, then turn counterclockwise one half turns, then hand tighten lock nut.

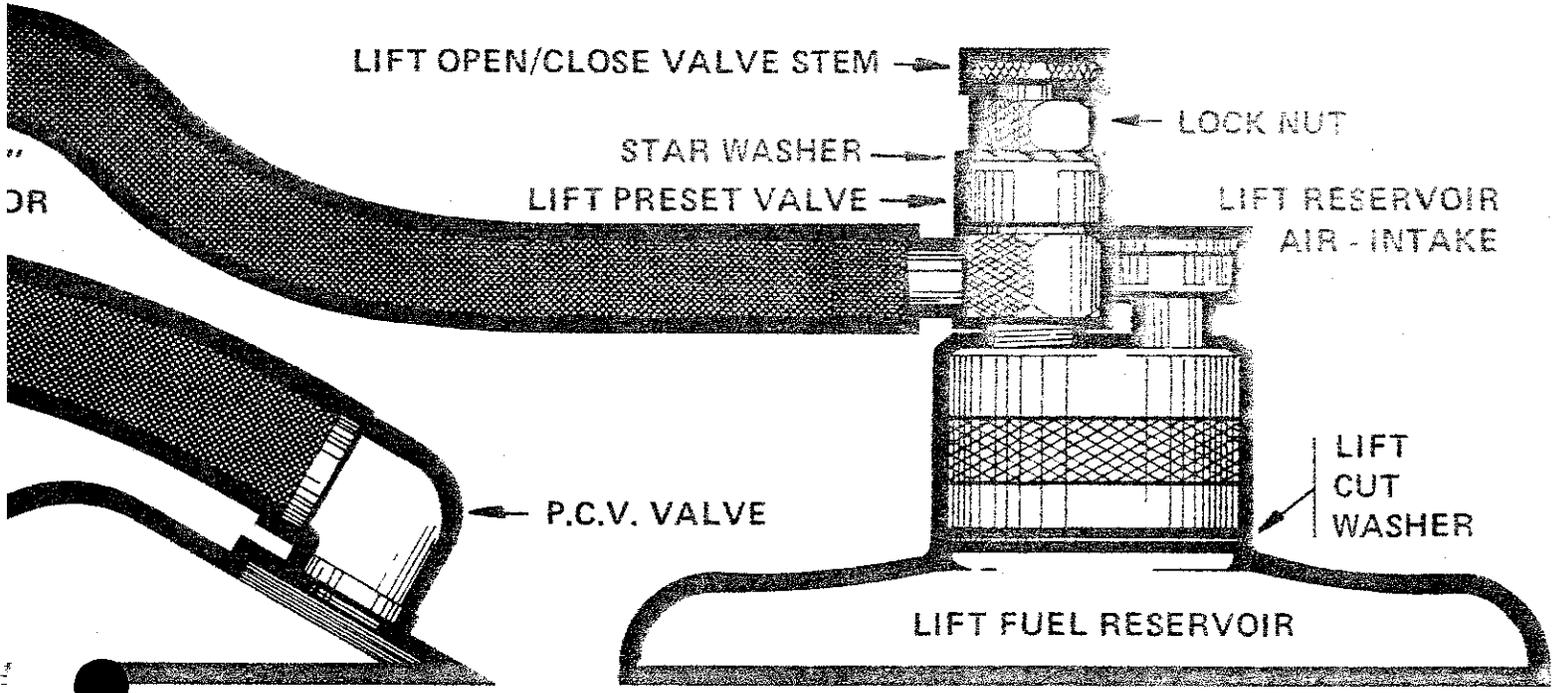

FUEL CONTENT

Inside the plastic bottle is a proprietary fluid, specification No. 1072, consisting of water, alcohols, ketones, aromatic hydrocarbons, and other organic compounds.

The control valve which admits vapor to the intake manifold is mounted on the cap of the bottle. This valve has only two positions — fully open or fully closed. It has an orifice diameter of .022 inches. The system contains a standpipe which provides venting to the atmosphere. The same model is used for applications to all vehicles.

SYSTEM FUNCTION

As the engine vacuum increases, bubbles are formed at the end of the standpipe due to the venting action. The rising vapor bubbles violently agitate the fluid and tend to increase vaporization. This vaporous-fluid mixture enters the engine through the PCV system, or any primary vacuum source to base of carburetor.

SYSTEM EVALUATION

St. Clair Sales and Distribution, Inc., has submitted emission results of CVS tests performed by Scott Research Laboratory. The data submitted generally show no adverse effect on emissions with this device when compared with the baseline data. Based on the information presented and operating characteristics of the system, no incompatibility exists with the accredited oxides of nitrogen retrofit devices.

WARRANTY

At any time, up to 60 days from date of purchase, you may return the LIFT Unit and receive a full refund, of the purchase price, less installation, FROM THE POINT OF PURCHASE.

LIFT Fuel Efficiency System is guaranteed by St. Clair Sales & Distribution, Inc. against any defect in workmanship or materials for a period of one year. Liabilities are limited to replacement of defective parts only. See your dealer for repairs or replacement. Enclosed warranty card must be returned to validate above warranty and guarantee.

IMPORTANT TIPS

1. Check all LIFT connections to insure against any vacuum leaks.
2. For best results, have your engine properly tuned after LIFT installation. LIFT will not correct pre-existing engine malfunctions.
3. Be certain to allow time (1,200 to 1,500 miles) for the LIFT System to cleanse your engine before achieving its maximum efficiency. In most cases you can use a lower octane gasoline with a LIFT System!
4. Compare your mileage improvement by keeping an accurate record on the enclosed warranty card. We would appreciate your comments.

LIFT REFILLS

When LIFT fuel mixture is within 1 or 2 inches from the bottom of the reservoir, carefully replace oil mixture with fresh LIFT Fuel. Old-fuel mixture should not be mixed with the new fuel.

You should get approximately 2,500 to 4,000 miles per 60-ozs. of LIFT Fuel, depending on engine cubic-inch displacement.

DISTRIBUTED BY:

LIFT FUEL EFFICIENCY SYSTEM

"A VAPOR INJECTOR"
7819 SANTA MONICA BLVD.
HOLLYWOOD, CALIF. 90046
213-656-2767

ST. CLAIR SALES AND DIST., INC.

40935 Production Drive - Mt. Clemens, Michigan 48043

January 22, 1974

Staff Report

Evaluation of St. Clair Sales & Distribution, Inc.
"Lift Fuel Efficiency System"
(Vapor Injector)
for Exemption from the Prohibitions
of Section 27156 of the Motor Vehicle Code

I. Introduction

St. Clair Sales & Distribution, Inc. of Mt. Clemens, Michigan, has applied for exemption from the prohibitions of Section 27156 of the Motor Vehicle Code for its "Lift Fuel Efficiency System". This section prohibits the installation of any device which reduces the effectiveness of the motor vehicle emission control system. The applicant is requesting an exemption for 1966-1974 model-year vehicles.

Based on statements received from St. Clair Sales, they have exclusive manufacturing and marketing rights to the system described herein.

Except for the control valve and fluid, the "Lift Fuel Efficiency System" is the same in all respects as the "Turbo Vapor Injector" which was granted an exemption from the prohibitions of Section 27156 by Executive Order D-2, dated April 17, 1973 for 1970 and older vehicles.

II. System Description

This device consist of a vapor injection system and proprietary fluid which is admitted into the PCV line. A plastic bottle is mounted in the engine compartment with a rubber hose providing the connection between the intake manifold and the device.

State of California

AIR RESOURCES BOARD

October 30, 1975

Addendum to the Staff Report
Dated December 30, 1974

"Evaluation of Lift, Inc.,
"Lift Fuel Efficiency System Vapor Injector"
for Exemption from the Prohibitions
of Section 27156 of the Motor Vehicle Code"

I. Introduction

Lift Inc. of Los Angeles, California has received an exemption from the prohibitions of Section 27156 of the Vehicle Code under "Executive Order D-24-3 for its "Lift Fuel Efficiency System" vapor injector for 1975 and older model vehicles. A description of the device, test data and other pertinent information in support of their application for this exemption will be found in the attached staff report dated December 30, 1974. The applicant has requested that this exemption be extended to include the 1976 model vehicles. (Exhibit A).

The applicant states that there is no change in the unit or its application.

II. Evaluation

The 1976 emission control systems are basically the same as the 1975 systems. Since the device has not been changed, the test data and other engineering considerations applied to the 1975 model vehicles will also be valid for the 1976 models. The staff has no basis upon which to deny the request of the applicant and concurs that the device will not increase emissions from the 1976 model vehicles.

III. Recommendation

The staff recommends adoption of Executive Order D-24-4 granting Lift Inc. exemption from the prohibition of Section 27156 of the Vehicle Code for its "Lift Fuel Efficiency System" vapor injector.

State of California

AIR RESOURCES BOARD

Staff Report

December 30, 1974

Evaluation of the Lift, Inc. "Lift Fuel Efficiency System" Vapor Injector for Compliance with the Requirements of Section 27156 of the California Motor Vehicle Code

I. Introduction

Lift, Inc. of 7819 Santa Monica Boulevard, Los Angeles, California 90046 has submitted an application requesting an exemption from Vehicle Code Section 27156 (Reference - Exhibit A - Application) for the "Lift Fuel Efficiency System". This Section of the Vehicle Code prohibits the installation of any device or mechanism which would adversely affect the performance of the emission control system. The applicant is requesting to extend their exemption to include the 1975 model year vehicles.

Lift, Inc. was granted an exemption to Vehicle Code Section 27156 by Executive Order D-23-2 dated July 12, 1974. The staff has previously evaluated this device and found it to have no adverse effect on 1974 and older model-year vehicles (Reference - Exhibit C and Exhibit D - January 22, 1974 and July 3, 1974 Staff Reports).

II. System Description

The "Lift Fuel Efficiency System" is a vapor injector device where the vapor enters the engine through the PCV system (Reference - Exhibit B - Installation Instructions). The device consists of a plastic tee, plastic bottle, rubber hose, mounting brackets, and a bottle cap containing an 0.022 inch restriction orifice. For a

December 30, 1974

description concerning the operation of this device, refer to the staff report dated January 22, 1974 (Reference - Exhibit C).

The fluid is a proprietary blend of alcohol and water solution. This fluid is manufactured by Kem Krest Product Company, 24684 Hathaway, Farmington, Michigan 48024. The composition of this fluid is identified by Kem Krest Specification Number 1072 and is on file with the Air Resources Board. The applicant has requested the fluid composition be treated as confidential information.

III. System Evaluation

The staff has determined from previous evaluations of vapor injector type devices on pre-1975 model-year vehicles that an increase in exhaust emissions will not occur if the vapor bleed rate is limited to 0.10 cubic feet per minute (cfm). The vapor bleed rate of the "Lift Fuel Efficiency System" is limited to 0.10 cfm by using a 0.022 inch orifice diameter. The staff believes the 0.10 cfm vapor bleed rate would not increase exhaust emissions on the 1975 model-year vehicles.

However, the catalytic converter system used on some of the 1975 model-year vehicles can be degraded by certain chemical compounds. Based on the information submitted by the applicant concerning the fluid composition, the staff investigated the effects of these chemicals on catalytic converters. From this investigation, the staff concludes the Kem Krest fluid does not contain any chemical compounds which will reduce the effectiveness of the catalyst.

Evaluation of the Lift, Inc. "Lift Fuel Efficiency System" Vapor Injector for Compliance with the Requirements of Section 27156 of the California Motor Vehicle Code

December 30, 1974

IV. Conclusion and Recommendation

The staff believes the "Lift Fuel Efficiency System" would not have an adverse effect on the emission control system provided that the flow rate is limited to 0.10 cfm and the fluid is identical to those submitted to the staff. The staff recommends that Lift, Inc. be granted an exemption to Section 27156 for the "Lift Fuel Efficiency System" on 1975 and older-model vehicles.

LIFT, INC.

7819 SANTA MONICA BOULEVARD
LOS ANGELES, CALIFORNIA 90046
P.O. BOX 5445
BEVERLY HILLS, CALIF. 90210
Telephone (213) 656-2767

September 19, 1974

William Simmons, Executive Officer
Air Resources Board, State of California
1709 11th Street
Sacramento, California 95814

Dear Mr. Simmons:

Enclosed please find our application for exemption under Section 27156 of the Vehicle Code of the State of California, for vehicles of model year 1975, for your approval.

As you know, the 1975 model cars are now being sold and your approval on our application for exemption is now being respectfully requested.

Looking forward to an early reply, I remain.

Cordially,

LIFT, INC.



William Hariton
President

WH/zd

cc: Richard Kenny
James Mikacich

Life Vapor Injector T.M.
4

TO: William Simmons, Executive Officer
Air Resources Board, State of California
1709 11th Street
Sacramento, California 95814

APPLICATION FOR EXEMPTION UNDER SECTION 27156 OF THE VEHICLE CODE OF THE STATE OF CALIFORNIA, FOR VEHICLES OF MODEL YEAR 1975.

We, WILLIAM HARITON, individually and as President of LIFT, INC., A California Corporation, and LIFT, INC., A California Corporation, do hereby, apply, request, and make application for exemption from the prohibitions of Vehicle Code Section 27156 for the device commonly known as LIFT FUEL EFFICENCY SYSTEM, an intake manifold vapor bleed. It is hereby acknowledged that the Air Resources Board has previously issued EXECUTIVE ORDER NO. D-24 on January 28, 1974, Executive Order No. D-24-1 on May 17, 1974, and Executive Order No. D-24-2 on July 12, 1974; all of these executive orders relating to the devise commonly known as LIFT FUEL EFFICENCY SYSTEM.

Executive Order No. D-24-2 of July 12, 1974 granted the exemption from the prohibitions of Section 27156 of the Vehicle Code for 1974 Model Year Vehicles and older. The purpose of this request and application is to continue this exemption for 1975 Model Year Vehicles and older.

LIFT, INC., A California Corporation, has established its home office at 7819 Santa Monica Blvd, Los Angeles, California 90046. Phone Number 213-656-2767. It is proceeding with its marketing and distribution of the LIFT FUEL EFFICENCY SYSTEM throughout the State of California in conformity to and subject to all the rules, laws, regulations of the State of California and subject to direct control of the policies and programs of the Air Resources Board of the State of California. There are presently no actions pending by any governmental ncy, either federal, state or county against LIFT, INC. All the requirements and mandates of the prior executive orders have been and

are being abided by and conformed to.

The basic discription of the product still remains the same. LIFT FUEL EFFICENCY SYSTEM is a compact unit which can be installed inside the engine compartment of any car or truck. The LIFT FUEL EFFICIENCY SYSTEM is a vopor induction system. It has a .022 open/shut valve. This set orfice controls the turbulation of the LIFT fuel and therefore, the vapor induced into the air-gasoline mixture for each combustion. The LIFT open/shut valve does not require adjusting.


Basically, LIFT FUEL EFFICIENCY SYSTEM is composed of a Plastic Fuel Reservoir or container; Control Valve, Hose and Connecting device, which attaches to your carburetor's Pollution Control Valve (PVC).

Within the reservoir is a proprietary blend of chemicals that vaporize from a balanced formula. This vapor is drawn off the air space at the top of the reservoir. It then leads into the carburetor to blend with the gasoline's air mixture before it goes into the cylinders. This catalytic action extends the burning time of gasoline, giving you increased combustion efficiency.

This application, in fact a re-application, is respectively submitted for immediate consideration.


Dated: September 19, 1974

Respectively submitted,

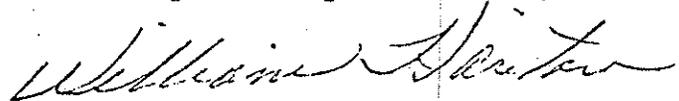

WILLIAM HARITON, Individually
and as President of LIFT, INC.,
A California Corporation

Exhibit B
Installation Instruction

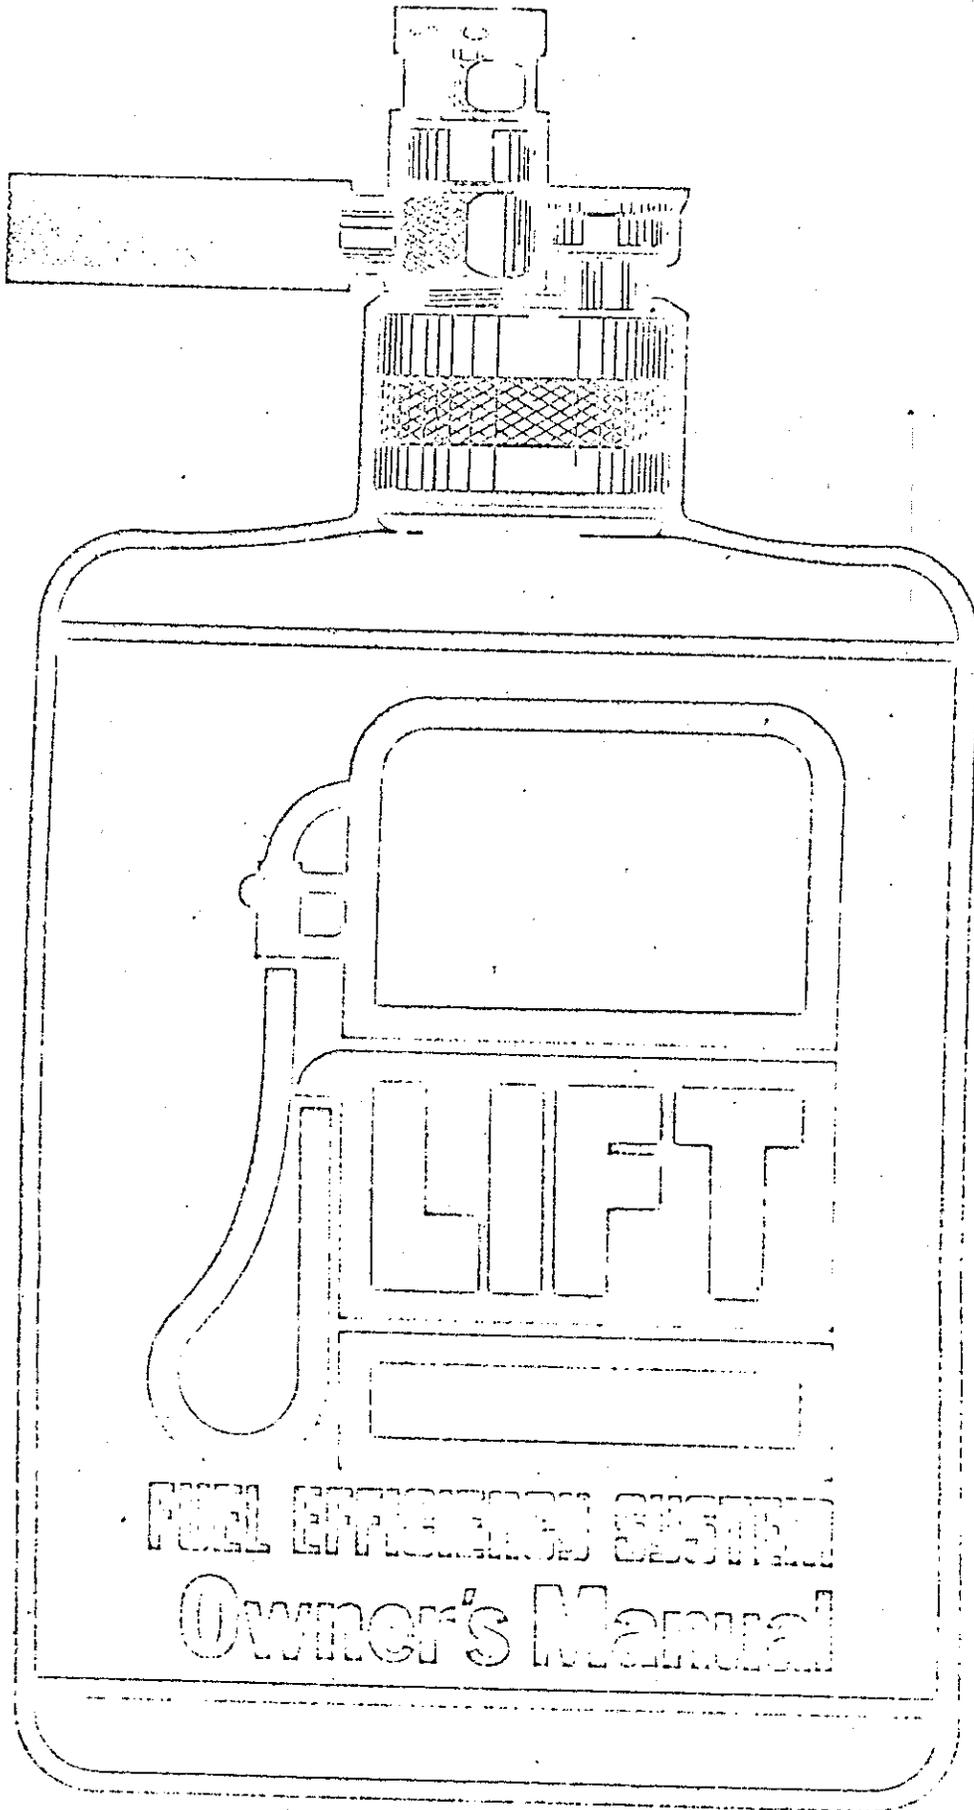

Inside the plastic bottle is a proprietary fluid, specification No. 1072, consisting of water, alcohols, ketones, aromatic hydrocarbons, and other organic compounds. The applicant claims this formulation will enhance engine performance and increase fuel economy.

The control valve which admits vapor to the intake manifold is mounted on the cap of the bottle. This valve has only two positions - fully open or fully closed. It has an orifice diameter of .022 inches. The system contains a standpipe which provides venting to the atmosphere. The same model is used for applications to all vehicles.

III. System Function

As the engine vacuum increases, bubbles are formed at the end of the standpipe due to the venting action. The rising vapor bubbles violently agitate the fluid and tend to increase vaporization. This vaporous-fluid mixture enters the engine through the PCV system.

IV. System Evaluation

St. Clair Sales and Distributors, Inc. has submitted emission results of CVS tests performed by Scott Research Laboratory. The data submitted generally show no adverse effect on emissions with this device when compared with the baseline data. Based on the information presented and operating characteristics of the system, no incompatibility exists with the accredited oxides of nitrogen retrofit devices.

Confirmatory testing was performed by the Air Resources Board Laboratory. The device was tested on a 1973 Plymouth/Satellite (360 CID) and 1974 Pontiac/Ventura (250 CID). Steady state tests were performed on the Pontiac and Plymouth and a hot CVS was also conducted on the Plymouth.

The steady state emission results of the Pontiac were generally lower than the baseline configuration. Steady state tests on the Plymouth also showed no significant change in emissions.

The CVS test on the 1973 Plymouth showed a decrease in carbon monoxide and essentially no change in hydrocarbons and oxides of nitrogen emissions. The results of this test are listed below.

	1973 Federal Cycle Hot Start Mass Emissions (Grams/Miles)		
	<u>HC</u>	<u>CO</u>	<u>NOx</u>
Baseline	0.76	11.13	2.55
Lift-System	0.78	6.21	2.67

These results were typical of the data submitted by the applicant.

V. Conclusion and Recommendation

The staff is of the opinion that the "Lift Fuel Efficiency System" would not have any adverse effect on the existing pollution control system.

January 22, 1974

Therefore, the staff recommends that the "Lift Fuel Efficiency System" be granted an exemption from the prohibitions of Section 27156 of the Vehicle Code for 1974 and older vehicles.

State of California

AIR RESOURCES BOARD

July 3, 1974

Staff Report

Addendum to the January 22, 1974 Staff Report
"Evaluation of St. Clair Sales & Distribution Inc.
'Lift Fuel Efficiency System' (Vapor Injector) for
Exemptions from the Prohibitions of Section 27156 of
the Motor Vehicle Code"

I. Introduction

The Air Resources Board Laboratory has conducted further emission testing with the "Lift Fuel Efficiency System" to confirm previous test results. This vapor injector is manufactured by St. Clair Sales & Distribution and utilizes a proprietary fluid manufactured by Kem Crest Products Company of Farmington, Michigan. The additional tests were performed at the requests of the Sacramento District Attorney and Staff Counsel to investigate the effectiveness of the "Lift" device.

St. Clair Sales & Distribution original application to the Air Resources Board for an exemption to Vehicle Code Section 27156 was dated November 28, 1973. An evaluation of the device showed that it would not have any adverse effect on emissions, and consequently, the Staff recommended in a staff report dated January 22, 1974, that an exemption be granted. Executive Order D-24 was issued on January 24, 1974 granting the exemption to Section 27156 of the Vehicle Code.

"Lift Fuel Efficiency System"

July 3, 1974

On May 17, 1974, Executive Order D-24-1 was issued revoking Executive Order D-24. The violation of the conditions of the Executive Order led to the revocation.

II. System Description

The "Lift Fuel Efficiency System" procured commercially was found to be basically the same device evaluated by the ARB staff previously. The orifice diameter of the control valve is 0.22 inches which is identical to the device previously evaluated. The device was received with the proprietary fluid.

Maximum air flow capacities of the present and original tested device are 0.060CFM and 0.080 CFM respectively. (See Figure 1 and Figure 2). The difference is within manufacturing tolerances.

III. Emission Test Program

The test program consisted of three pairs of back to back hot CVS-1 tests comparing the emissions with and without the device. The three pair tests have been determined by the staff as being sufficient to determine whether the device would have a significant effect on the emission control system.

The vehicle selected had the following specifications:

Make and Model Year:	1973 Ford Pinto
Engine	2000 cc

"Lift Fuel Efficiency System"

July 3, 1974

Carburetor	Weber - 2 barrel
Transmission	Automatic
Emission Control System	Engine Modification

After the vehicle was received by the ARB staff, the vehicle was pre-checked to assure all carburetor and ignition settings were adjusted to OEM. At the end of each test, the settings were checked and adjusted.

IV. Emission Results and Evaluation

The following tables summarizes the emission testing results of this program.

<u>Date</u>	<u>Vehicle Configuration</u>	<u>Exhaust Emissions gm/mi</u>				<u>Fuel Consumption mpg</u>
		<u>HC</u>	<u>CO</u>	<u>NOx</u>	<u>CO₂</u>	
6/6/74	Baseline	1.28	14.25	2.41	400.83	20.78
6/6/74	Lift	1.41	14.34	2.59	393.80	21.10
6/6/74	Baseline	1.31	12.87	2.62	406.16	20.62
6/6/74	Lift	1.30	13.18	2.65	405.16	20.64
6/6/74	Baseline	1.35	13.98	2.79	387.91	21.44
6/6/74	Lift	1.30	13.96	2.55	383.14	21.70
	Average Baseline	1.31	13.70	2.61	398.30	20.95
	Average "Lift"	1.34	13.82	2.60	394.03	21.15

"Lift Fuel Efficiency System"

July 3, 1974


The above emission data are typical for this type of vehicle. The slight change in emission and fuel economy with the device when compared to the baseline vehicle is not considered to be of any practical significance. These results were similar to previous tests.

V. Conclusion

Based on all the available data, the Staff is of the opinion that this device would have no significant effects on exhaust emissions and fuel economy.

Figure 2

Flow of "Lift" Device Evaluation
Previous Staff Report

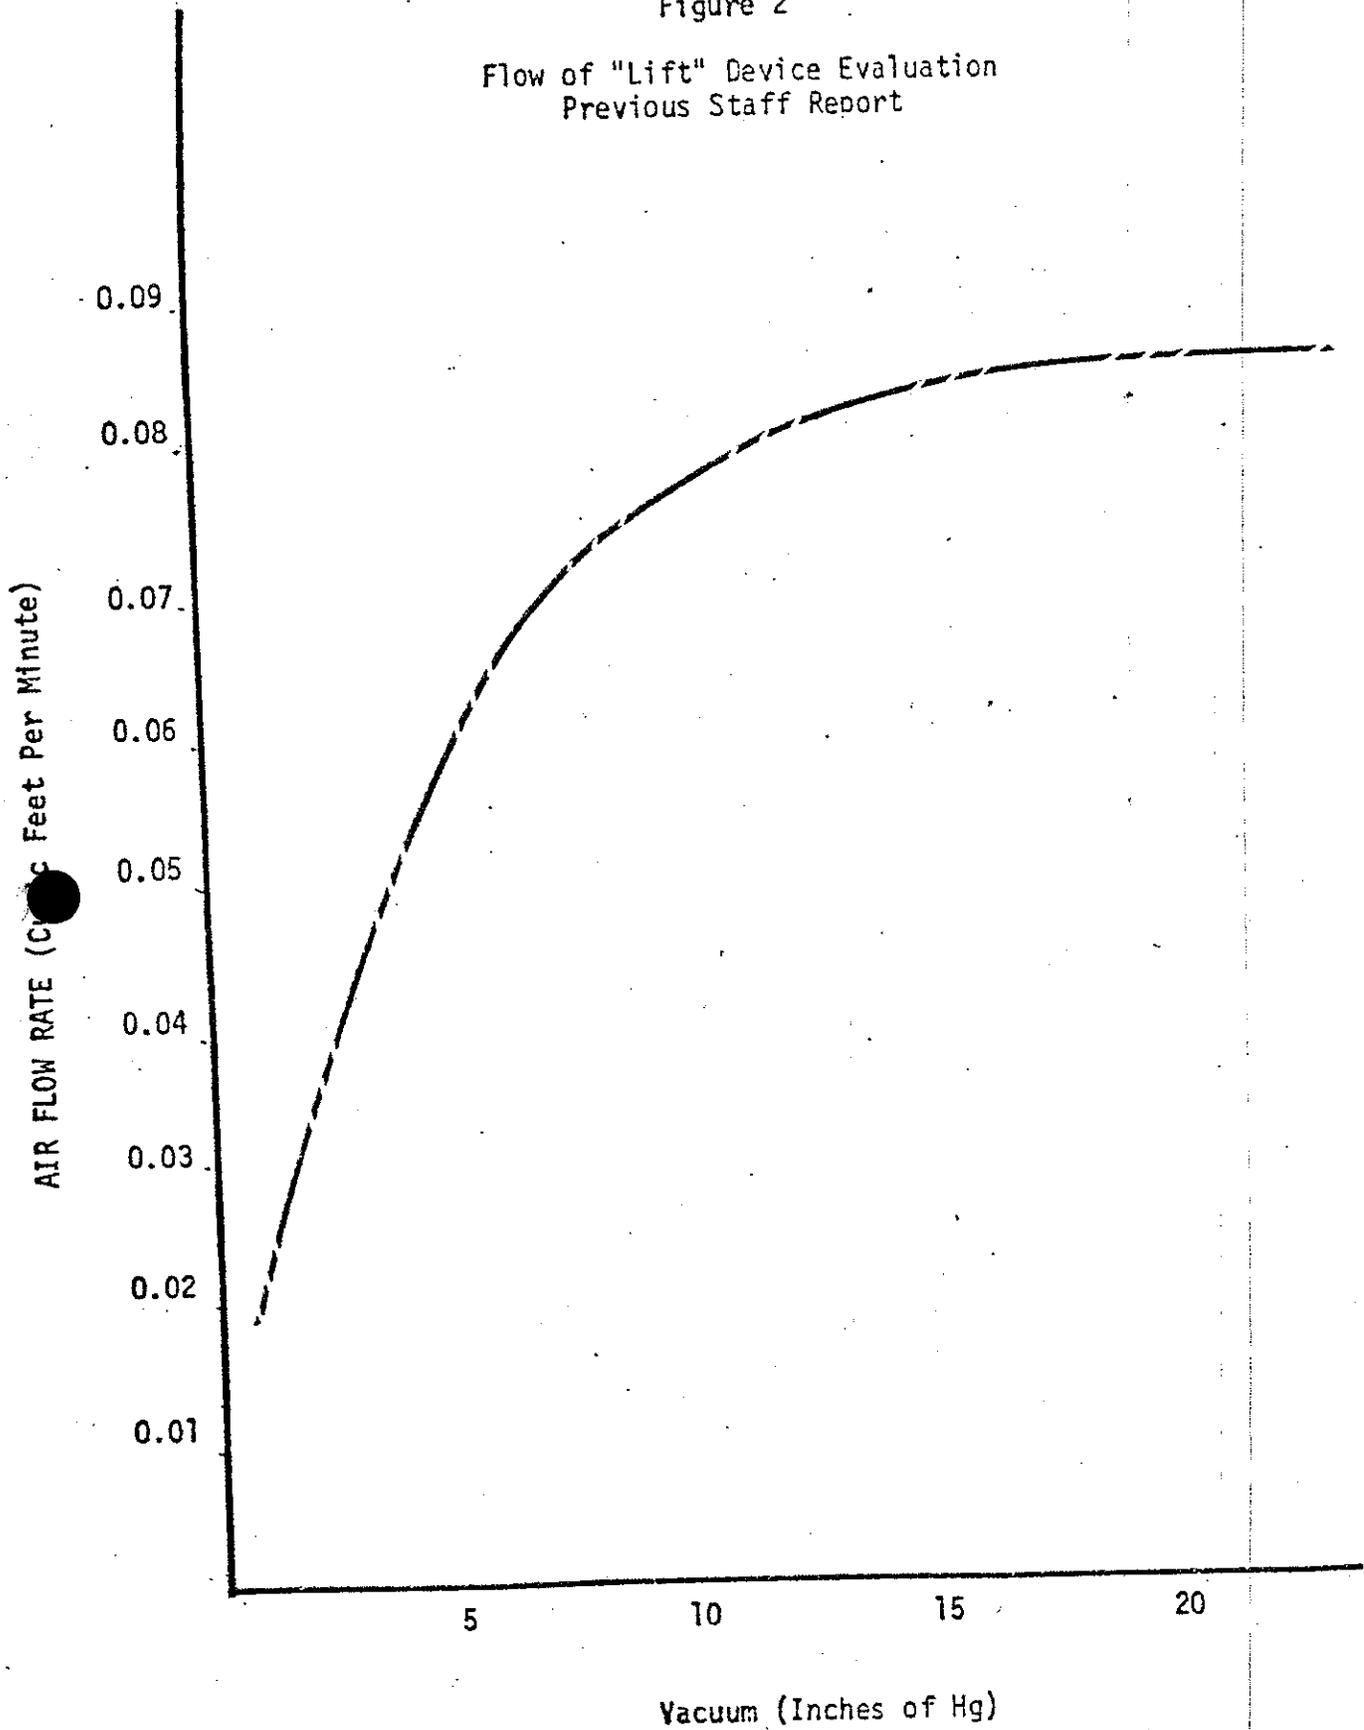


LIFT, INC.

7819 SANTA MONICA BOULEVARD
LOS ANGELES, CALIFORNIA 90046

P.O. BOX 5445

BEVERLY HILLS, CALIF. 90210

Telephone (213) 656-2767

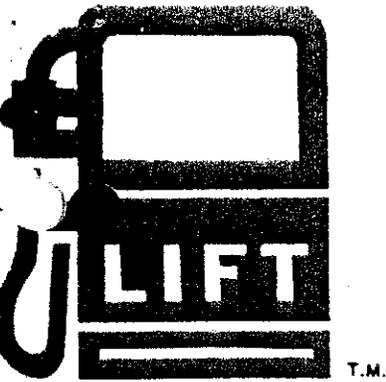

October 14, 1975

Mr. G. C. Hoff
Chief of Vehicle Emission Control
Air Resources Board
9528 Telstar
El Monte, CA 91731

Dear Mr. Hoff:

Enclosed please find our application for exemption under Section 27156 of the Vehicle Code of the State of California, for vehicles of model year 1976, for your approval.

As you know, the 1976 model cars are now being sold and your approval on our application for exemption is now being respectfully requested.

Looking forward to an early reply, I remain.

Cordially,
LIFT, INC.



William Hariton
President

cc: Richard Kenny
James Mikacich
William Simmons

Lift Vapor Injector T.M.

TO: Mr. G. C. Hoff, Chief of Vehicle Emission Control
Air Resources Board
9528 Telstar
El Monte, CA 91731

RE: APPLICATION FOR EXEMPTION UNDER SECTION 27156 OF THE VEHICLE CODE
OF THE STATE OF CALIFORNIA, FOR VEHICLES OF MODEL YEAR 1976

We, WILLIAM HARITON, individually and a President of LIFT, INC., A California Corporation, and LIFT, INC., A California Corporation, do hereby, apply, request, and make application for exemption from the prohibitions of Vehicle Code Section 27156 for the device commonly known as LIFT FUEL EFFICIENCY SYSTEM, an intake manifold vapor bleed. It is hereby acknowledged that the Air Resources Board has previously issued EXECUTIVE ORDER NO. D-24 on January 28, 1974, Executive Order NO. D-24-1 on May 17, 1974, Executive Order NO. D-24-2 on July 12, 1974 and Executive Order NO. D-24-3 on January 31, 1975; all of these Executive Orders relating to the device commonly known as LIFT FUEL EFFICIENCY SYSTEM.

Executive Order NO. D-24-3 of January 31, 1975 granted the exemption from the prohibitions of Section 27156 of the Vehicle Code for 1975 Model Year Vehicles and older. The purpose of this request and application is to continue this exemption for 1976 Model Year Vehicles and older.

LIFT, INC., A California Corporation, has established its home office at 7819 Santa Monica Boulevard, Los Angeles, California 90046. Phone Number 213-656-2767. It is proceeding with its marketing and distribution of the LIFT FUEL EFFICIENCY SYSTEM throughout the State of California in conformity to and subject to all the rules, laws, regulations of the State of California and subject to direct control of the policies and programs of the Air Resources Board of the State of California. There are presently no actions pending by any governmental agency, either federal, state or county against LIFT, INC. All the requirements and mandates of the prior Executive Orders have been and are being abided by and conformed to.

The basic description of the of the product still remains the same. LIFT FUEL EFFICIENCY SYSTEM is a compact unit which can be installed beside the engine compartment of any car or truck. The LIFT FUEL EFFICIENCY SYSTEM is a vapor induction system. It has a .022 open/shut valve.

This set orifice controls the turbulation of the LIFT fuel and therefore, the vapor induced into the air-gasoline mixture for each combustion. The LIFT open/shut valve does not require adjusting.

Basically, LIFT FUEL EFFICIENCY SYSTEM is composed of a Plastic Fuel Reservoir or container; Control Valve, Hose and Connecting device, which attaches to your carburetor's Pollution Control Valve (PVC).


Within the reservoir is a proprietary blend of chemicals that vaporize from a balanced formula. This vapor is drawn off the air space at the top of the reservoir. It then leads into the carburetor to blend with the gasoline's air mixture before it goes into the cylinders. This catalytic action extends the burning time of gasoline, giving you increased combustion efficiency.

This application, in fact a re-application, is respectfully submitted for immediate consideration.

DATED:

October 14, 1978

Respectfully submitted,

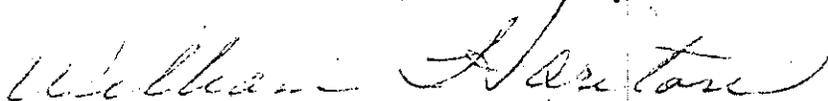

WILLIAM HARITON, Individually
and as President of LIFT, INC.,
A California Corporation