

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-290-48

Relating to Certification of New Heavy-Duty Motor Vehicle Engines

DETROIT DIESEL CORPORATION

Pursuant to the authority vested in the Air Resources Board by Sections 43100, 43102 and 43103 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following Detroit Diesel Corporation 1996 model diesel engines are certified for use in motor vehicles with a manufacturer's gross vehicle weight rating (GVWR) over 14,000 pounds:

Fuel Type: Diesel

<u>Engine Family</u>	<u>Liters (Cubic Inches)</u>	<u>Exhaust Emission Control Systems and Special Features</u>
TDD8.5EJDARA (SERIES-50)	8.5 (518)	Powertrain Control Module Turbocharger Charge Air Cooler

Engine models and codes are listed on attachments.

The certification exhaust emission standards for this engine family in grams per brake horsepower-hour are:

<u>Total Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulates</u>
1.3	15.5	5.0	0.10

The certification exhaust emission values for this engine family in grams per brake horsepower-hour are:

<u>Engine Family</u>	<u>Total Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulates</u>
TDD8.5EJDARA (SERIES-50)	0.1	1.6	4.7	0.09

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

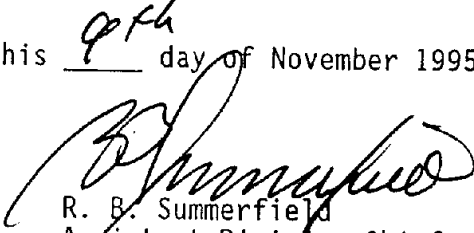
DETROIT DIESEL CORPORATION

EXECUTIVE ORDER A-290-48
(Page 2 of 2)

Engines certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachments.

Executed at El Monte, California this 9th day of November 1995.


R. B. Summerfield
Assistant Division Chief
Mobile Source Division

1996 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
HEAVY-DUTY DIESEL-STANDARD ENGINES

Manufacturer: Detroit Diesel Corporation
 Displacement: 8.5 Liters 518 Cubic Inches
 Maximum Rated Power: 300 HP @ 2100 RPM
 Ignition: Compression Compression with Glow Plug Spark
 Fuel Type(s): Dedicated Flex-Fuel Dual-Fuel Diesel M100 M85
 CNG LNG LPG Other (specify) _____
 Diesel Cert Fuel: 13 CCR 2282 40 CFR 86.1313-90 40 CFR 86.1313-94
 Primary Intended Service Class: LHD MHD HHD Urban Bus
 Exhaust ECS (include. MFI, TC, CAC): ECM/PCM, CAC, (TC)

Engine Family: TDD8.5EJDARA

Engine Configuration: I-4

Engine Model (Eng Code)	Rated HP @ RPM	Fuel Rate @Rated HP mm3/Stroke (lbs/hr)	Fuel Pump & Injector Part No.	ECM/PCM Part No.	EGR Valve Part No.	PTOX/ Catalytic Converter Part No.
SERIES 50						
1D			(RESERVED)			
2D			(RESERVED)			
3D	300@2100	215.2 (100.2)	5235550	23513553		
4D	300@1800	239.1 (95.4)	5235550	23513553		
5D	275@2100	197.9 (92.2)	5235550	23513553		
6D	250@2100	179.3 (83.5)	5235550	23513553		