

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-120-1 - *Revised - Dec-5*  
Relating to Certification of New Motor Vehicles

*J. Wood*

DIVERSIFIED FOUR WHEEL DRIVE, INC.

Pursuant to the authority vested in the Air Resources Board by Sections 43100, 43102, and 43103 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-3;

IT IS ORDERED AND RESOLVED: That Diversified Four Wheel Drive, Inc. exhaust emission control systems for 1977 model-year light duty trucks are certified for the engine family described below:

- Engine Family: 20R(TC)
- Engine: 133 CID
- Transmission: 4 Speed Manual or 5 Speed Manual
- Exhaust Emission Control Systems: Air Injection, Engine Modification, Exhaust Gas Recirculation, Oxidation Catalyst

- Models: Tiger 4 x 4 Light-Duty Truck #1 4M
- Tiger 4 x 4 Light-Duty Truck #2 4M
- Tiger 4 x 4 Light-Duty Truck #1 5M
- Tiger 4 x 4 Light-Duty Truck #2 5M
- Tiger 4 x 4 Light-Duty Truck Cab & Chassis

The following are the recommended values to be listed on the window decal required by California Assembly-Line Test Procedures for 1977 model-year vehicles:

<u>Engine Family</u>	<u>Hydrocarbons Grams per Mile</u>	<u>Carbon Monoxide Grams per Mile</u>	<u>Nitrogen Oxides Grams per Mile</u>
20R(TC)	0.3	2	1.8


BE IT FURTHER RESOLVED: That this certification is contingent upon Diversified Four Wheel Drive, Inc. affixing a permanent catalyst overheat warning label on the driver's sun-visor of all catalyst-equipped vehicles. This label must be approved by the Executive Officer.

BE IT FURTHER RESOLVED: That this certification is also contingent upon Diversified Four Wheel Drive, Inc. listing in the owner's manual the operating cautions associated with a catalyst-equipped vehicle. This listing must be approved by the Executive Officer.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Department of Motor Vehicles, the California Highway Patrol, and the Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California, this 28 day of January, 1977.

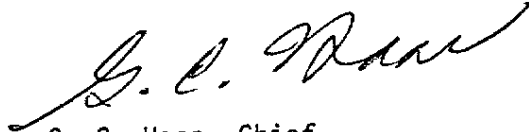

G. C. Hass, Chief  
Vehicle Emissions Control Division

DIVERSIFIED FOUR WHEEL

Manufacturer DRIVE, INC. Executive Order No. A-120-1 Page 1

Engine Family 20R(TC) Engine (CID) 133.6 Engine Code \_\_\_\_\_

Emission Control System AI-EGR-EM-OC +10%(A/C) Yes  No

Vehicle Models (If Coded see attachment)	Trans	Inertia Weight	Distributor Type: C,V,VI Mfgr. Part Number	Fuel System Type: 1-2V Mfgr. Part Number	EGR System Part No. Service**	Tune-Up Specification (1) Basic Timing (2) Idle Mixture (3) Idle Speed
Tiger 4x4 Light-Duty: Truck 1 Truck 2	M/T4 M/T5	3000	Nippondenso 19100-38020	Aisan Kogyo 21100-38160	25620-38100	(1) 8° BTDC @ 800 RPM in neutral; vacuum line remain connected to distributor.
Tiger 4x4 Light-Duty Cab and Chassis	M/T4	3500	19100-38011		25620-38120	(2) Lean Drop idle (See attached sheet).  (3) 800 RPM in neutral.

Comments \*\* No Service  
Shift speed (1 to 2) 10 mph, (2 to 3) 20 mph, (3 to 4) 30 mph, (4 to 5) 40 mph  
Axle ratio: 4.111

Date of Issue

Abbreviations

Distributor

- C-Centrifugal Advance
- V-Vacuum Advance
- VR-Vacuum Retard
- HEI-High Energy Ignition
- EI-Electronic Ignition

Fuel System

- EFI, FI
- nV-nVenturi Carburetor
- VV-Variable Venturi

Exhaust Emission Control System

- AI-Air Injection
- CAI-Catalyst Air Injection
- EFI-Electronic Fuel Injection
- EGR-Exhaust Gas Recirculation
- EM-Engine Modification
- EFE-Early Fuel Evaporation
- ESAC-Electronic Spark Advance Control
- FI-Fuel Injection

- OC-Oxidation Catalyst
- PAI-Pulse Air Injection
- RC-Reduction Catalyst
- TR-Thermal Reactor
- TWC-Three Way Catalyst
- λ-Air Fuel Ratio Sensor

\*Service

- I-Inspect, repair/replace as needed
- R-Replace

Toyota Lean Idle Drop Method  
Attachment to Diversified Four Wheel Drive, Inc.

Supplemental Data Sheet

Engine Family: 20 R(TC)

Page 1 of 1

All adjustment must be made with engine at normal operating temperature.

- (1) Coolant temperature 190°F
- (2) Choke valve fully open

Before adjusting the idle mixture, the basic timing, 8° BTDC @ 800 RPM (manual transmission (M/T) or 8° BTDC @ 850 RPM, (automatic transmission (A/T) and idle speed, 800 RPM (M/T) or 850 RPM (A/T), must be within specifications. All adjustments must be made in neutral with all accessories (wipers, heater, air conditioning, etc.) off.

Adjust the idle mixture screw to obtain the maximum engine speed (engine RPM). Readjust idle speed screw to return engine speed to 870 RPM (M/T) or 920 RPM (A/T). Repeat attempt to increase the engine speed by adjusting idle mixture screw and again readjusting the engine speed back to 870 RPM (M/T) or 920 RPM (A/T). When it is no longer possible to increase engine speed by adjusting the mixture screw, the idle mixture screw must be adjusted until the idle speed at 800 RPM (M/T) or 850 RPM (A/T) is obtained.