

File

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-30-105  
Relating to Certification of New Motor Vehicles

AUDI AG

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1996 model-year Audi AG exhaust emission control systems are certified as described below for passenger cars:

Fuel Type: Gasoline

Engine Family: TAD2.8V8GFFM Displacement: 2.8 Liters (169 Cubic Inches)

Exhaust Emission Control Systems & Special Features:

Sequential Multiport Fuel Injection  
Dual Three Way Catalytic Converters  
Dual Heated Oxygen Sensors (Two)  
Exhaust Gas Recirculation

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The certification exhaust emission standards for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.25	3.4	0.4	10.0
100,000	0.31	4.2	0.6	n/a

The certification exhaust emission values for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.13	2.0	0.2	4.6
100,000	0.15	2.5	0.2	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average non-methane organic gas (NMOG) exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles".

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the 50,000-mile evaporative emission standards applicable to 1980 through 1994 model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles", and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That, based on the evaporative emission phase-in compliance schedule submitted by the vehicle manufacturer, the listed vehicle models shall not be subject to the running loss and useful life standards set forth in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles".

BE IT FURTHER RESOLVED: That the manufacturer is certifying the listed vehicle models with a partially complying on-board diagnostic system for the aforementioned model year pursuant to Title 13, California Code of Regulations, Section 1968.1(m)(6.1) ("Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines").


BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 15<sup>th</sup> day of August 1995.

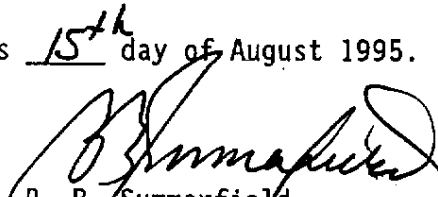

R. B. Summerfield  
Assistant Division Chief  
Mobile Source Division

1996 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: AUDI AG Exh Eng Fam: TAD2.8V8GFFM Evap Fam: TAD1085BYPAV  
 All Eng Codes in Eng Fam: CA 49S 50S X AB965  
 Exh Std: CA Tier-1 X TLEV      LEV      ULEV      ZEV     ; US EPA Tier-1 X  
 Evap Std: 50K X Useful Life with R/L      In-use Exh Std: Full In Use X Alt In Use       
 Veh Class(es): PC X LDT1      LDT2      MDV1      MDV2      MDV3      MDV4      MDV5       
 Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1, MDV1, MDV2, MDV3, MDV4)  
 Fuel Type(s): Dedicated X Flex-Fuel      Dual-Fuel      Bi-Fuel      Gasoline X Diesel       
                   CNG      LNG      LPG      M85      Other (specify)       
 Emiss Test Fuel(s): Indo X Ph2      CNG      LPG      M85      Other (specify)       
                                   Diesel: 13 CCR 2282      40 CFR 86.113-90      40 CFR 86.113-94       
 Service Accum: Std AMA X Mod AMA      Mfr ADP      Other (specify)       
 NMOG Test Procedure: N/A X Std      Equip      R/L Test Proc: SHED      Pt Source       
 Hybrid: Type A      B      C      APU Cycle (e.g., Otto, Diesel, Turbine)       
 Engine Config. V6 Displacement: 2.8 Liters 169 Cubic Inches  
 Valves per Cylinder: 2 Rated HP: 172 @ 5500 RPM  
 Engine: Front X Mid.      Rear      Drive: FWD X RWD      4WD-FT X 4WD-PT       
 Exhaust ECS (eg., EGR, MFI, TC, CAC, etc.) SFI / 2TWC / 2-HO2S~~2~~ EGR  
 (use abbreviations per SAE 1930 SEP91)

Engine Code (also list CA/49ST/50ST)	Vehicles Models (if coded see attachment)	Trans. Type A-auto M-man.	ETW or Test WT	DPA or RLHP	Ignition (ECM/PCM) Part No.	EGR System Part No.	Catalytic Converter Part No.
AJRE	A4	L5	3375	5.7	8D0 906 266	078 191 503 / 054 131 501	8D0 178 C and 8D0 178 D
"	"	M5	3250	5.7	"	"	"
"	A4 Quattro	M5Q	3500	6.8	"	"	"

Date Issued: 05-15-95

Revisions: \_\_\_\_\_