

File

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-10-705  
Relating to Certification of New Motor Vehicles

FORD MOTOR COMPANY

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That Ford Motor Company 1997 model-year exhaust emission control systems are certified as described below for light-duty trucks:

Fuel Type: Gasoline

Engine Family: VFM3.028G1EK Displacement: 3.0 Liters (183 Cubic Inches)

Exhaust Emission Control Systems & Special Features:

- Dual Three Way Catalytic Converters
- Dual Heated Oxygen Sensors (two)
- Exhaust Gas Recirculation
- Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The certification exhaust emission standards for this engine family in grams per mile are:

<u>Loaded Vehicle Weight (lbs.)</u>	<u>Miles</u>	<u>Non-Methane Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Carbon Monoxide (20°F)</u>
3751-5750	50,000	0.32	4.4	0.7	12.5
	100,000	0.40	5.5	0.97	n/a

The certification exhaust emission values for this engine family in grams per mile are:

<u>Loaded Vehicle Weight (lbs.)</u>	<u>Miles</u>	<u>Non-Methane Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Carbon Monoxide (20°F)</u>
3751-5750	50,000	0.09	0.7	0.4	4.5
	100,000	0.12	0.7	0.54	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is verifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average non-methane organic gases (NMOG) exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the 50,000-mile evaporative emission standards applicable to 1980 through 1994 model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That, based on the evaporative emission phase-in compliance schedule submitted by the vehicle manufacturer, the listed vehicle models shall not be subject to the running loss and useful life standards set forth in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

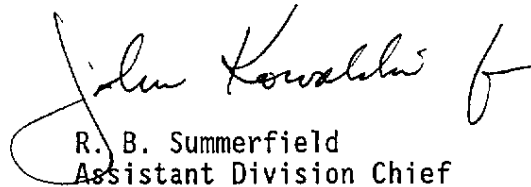
BE IT FURTHER RESOLVED: That the manufacturer is certifying the listed vehicle models with a partially complying on-board diagnostic system for the aforementioned model year pursuant to Title 13, California Code of Regulations, Section 1968.1(m)(6.2) ("Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty vehicles and Engines").

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations,

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 12<sup>th</sup> day of September 1996.

  
R. B. Summerfield  
Assistant Division Chief  
Mobile Source Division

E.O.# A-10-705

1997 MODEL YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET  
 EXHAUST/EVAPORATIVE SYSTEM & CALIFORNIA REQUIREMENTS  
 PASSENGER CARS, LIGHT-DUTY AND MEDIUM-DUTY TRUCKS

Manfr. FORD MOTOR COMPANY

Exhaust Engine Family: VFM3.028G1EK

Engine Code Types: CA X 49S \_\_\_ 50S \_\_\_

Evap Emissions Family: VFM1045AYPBB

Exh Std: Tier-0 \_\_\_ Tier-1 X TLEV \_\_\_ LEV \_\_\_ ULEV \_\_\_ ZEV \_\_\_ EPA TIER-0 \_\_\_ TIER-1 \_\_\_

Evap Std: 50K X Useful Life with R/L \_\_\_ In-Use Exh Std: Full In Use X Alt In Use \_\_\_

Veh Class(es): PC \_\_\_ LDT1 \_\_\_ LDT2 X MDV1 \_\_\_ MDV2 \_\_\_ MDV3 \_\_\_ MDV4 \_\_\_ MDV5 \_\_\_

Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1,MDV1,MDV2,MDV3,MDV4)

Exh Cert Fuel(s): Indo X Ph2 \_\_\_ Diesel: 13 CCR 2282 \_\_\_ or 40CFR 86.113-90 \_\_\_ or -94 \_\_\_  
 M85 \_\_\_ CNG \_\_\_ LPG \_\_\_ Other (specify) \_\_\_

Fuel Type(s): Dedicated \_\_\_ Flex Fuel \_\_\_ Dual-Fuel \_\_\_  
 Gasoline X Diesel \_\_\_ M85 \_\_\_ CNG \_\_\_ LPG \_\_\_ Other (specify) \_\_\_

Hybrid: Type A \_\_\_ B \_\_\_ C \_\_\_, APU Cycle (eg., Otto, Diesel, Turbine) \_\_\_

Engine Config V-Block Displacement: 3.0L (183) Liters (Cubic Inches)

Valves/Cyl: 2 Rated HP: 150 @ 5000 RPM

Engine: Front X Mid \_\_\_ Rear \_\_\_ Drive: Fwd X RWD \_\_\_ 4WD-FT \_\_\_ 4WD-PT \_\_\_

Service Accum: Std AMA

Exhaust Control System and Special Features 2 TWC, 2HO2S(2) EGR, SFI, :

(Use abbreviations per SAE J1930 SEP91)

Engine Code also list CA/49ST/50ST	Vehicle Models (if coded see attachment)	Trans. Type A-Automatic M-Manual	ETW or Test Wt	DPA or RLHP	Ignition (ECM/PCM) Part No.	EGR System Part No.	Catalytic Converter Part No.
556PR16N	Windstar Van 2WD	A(DL)	3875	8.8	F58F-GC	F37E-CA	F68A-ARA
556PR16A	Windstar Van 2WD	A(DL)	3875	9.7		alt:	
556PR16N	Windstar CW 2WD	A(DL)	4000	7.9		F6AE-BA	
556PR16A	Windstar CW 2WD	A(DL)	40000	8.7			

Engine Family: V3.0WINC

20.09.17.02 - 1

Issue Date: **AUG 28 1996**  
 Revised: