

File

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-6-804-1
Relating to Certification of New Motor Vehicles

GENERAL MOTORS CORPORATION

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1998 model-year General Motors Corporation exhaust emission control systems are certified as described below for light-duty trucks:

Emission Standard Category: Transitional Low-Emission Vehicle (TLEV)

Fuel Type: Gasoline

Engine Family: WGMXT04.3185 Displacement: 4.3 Liters (262 Cubic Inches)

Exhaust Emission Control Systems and Special Features:

- Three Way Catalytic Converter
- Warm Up Three Way Catalytic Converter
- Dual Heated Oxygen Sensors
- Heated Oxygen Sensor
- Exhaust Gas Recirculation
- Secondary Air Injection
- Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The non-methane organic gas (NMOG), carbon monoxide (CO), oxides of nitrogen (NOx), and formaldehyde (HCHO) TLEV certification exhaust emission standards for this engine family in grams per mile are:

<u>Loaded Vehicle Weight (lbs.)</u>	<u>Miles</u>	<u>NMOG</u>	<u>CO</u>	<u>NOx</u>	<u>HCHO</u>	<u>CO (20°F)</u>
3751-5750	50,000	0.160	4.4	0.7	0.018	12.5
	100,000	0.200	5.5	0.9	0.023	n/a

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.98

The certification exhaust emission values set forth for NMOG reflect application of a 0.98 RAF for 1998 model-year TLEVs. The TLEV certification exhaust emission values for this engine family in grams per mile are:

<u>Loaded Vehicle Weight (lbs.)</u>	<u>Miles</u>	<u>NMOG</u>	<u>CO</u>	<u>NOx</u>	<u>HCHO</u>	<u>CO (20°F)</u>
3751-5750	50,000	0.042	0.5	0.1	0.001	4.8
	100,000	0.046	0.5	0.2	0.001	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

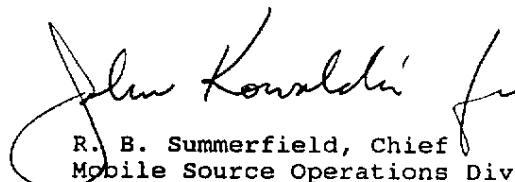
BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 17th day of June 1998.


R. B. Summerfield, Chief
Mobile Source Operations Division

1998 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET

MFR: GENERAL MOTORS CORP. ENGINE FAMILY: WGMXT04.3185 EVAP FAMILY: WGMXE0095904
 ALL ENGINE CODES IN ENGINE FAMILY: CA (X) 49S () 50S () AB965 () ORVR: YES () NO (X)
 EXH STD: CA TIER-1 () TLEV (X) LEV () ULEV () SULEV (); U.S. EPA TIER-1 ()
 VEH CLASS(ES): PC () LDT1 () LDT2 (X) MDV1 () MDV2 () MDV3 () MDV4 () MDV5 ()
 SINGLE CERT STANDARD FOR MULTI-CLASS ENGINE FAMILY: NA
 FUEL TYPE(S): DEDICATED (X) GASOLINE (X); EXH EMIS TEST FUEL(S): INDOLINE () CBG (X)
 EVAP EMIS TEST PROCEDURE: CALIF () FED (X)
 SERVICE ACCUMULATION: STD AMA () MFR ADP (X); NMOG TEST PROCEDURE: NA () EQUIV (X)
 R/L TEST PROCEDURE: PT SOURCE (X)
 ENGINE CONFIGURATION: I4 () V6 (X) V8 () DISPLACEMENT: 4.3 LITERS / 262 CU. IN.
 VALVES / CYLINDER: 2 (X) 4 () RATED HP: 180 @ 4400 RPM
 RATED HP: 190 @ 4400 RPM
 ENGINE LOCATION: FRONT (X) DRIVE: FWD () RWD (X) 4WD-FT () 4WD-PT (X)
 EXHAUST EMISSION CONTROL SYSTEM: LEGR, WUTWC+TWC, SFI, 2HO2S-HO2S,AIR
 RLHP / DPA VALUES: SECTION 08.13.02.00

ENGINE CODE & LETTER DERIVATIVES*1	LOC (C/F/NW)	VEH MODELS (SEE PAGE 1)	TRANS (M5,A4,ETC.)	EQUIV. TEST WEIGHT	EGR SYSTEM PART NO.	CATALYTIC CONVERTER PART NO.
1,2	C	T10603 JT10603 T10803 T10653 JT10653	A4	4000 4250	25312788	25175249, 25173633- Warm-Up
11,12		T10603 T10803 T10653 S10516 T10516		4000 4250 4000 4500		25175249 (T-PU), 25314447 (4DR UTL), 25314446 (2DR UTL), 25173633- Warm-Up

*1 Base engine codes are the same as letter derivatives unless otherwise noted. Refer to PCM/VCM part number page for additional engine code letter derivative information.

CARLINE NAME	CARLINE CODE
GMC SONOMA PU	04072
CHEVROLET S10 PU	03037
HOMBRE PU	11550
CHEVROLET BLAZER 2WD	03090
CHEVROLET BLAZER 4WD	03070
GMC JIMMY 2WD	04076
GMC JIMMY 4WD	04060

1998 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET

MFR: GENERAL MOTORS CORP. ENGINE FAMILY: WGMXT04.3185 EVAP FAMILY: WGMXE0095905
 ALL ENGINE CODES IN ENGINE FAMILY: CA (X) 49S () 50S () AB965 () ORVR: YES () NO (X)
 EXH STD: CA TIER-1 () TLEV (X) LEV () ULEV () SULEV (); U.S. EPA TIER-1 ()
 VEH CLASS(ES): PC () LDT1 () LDT2 (X) MDV1 () MDV2 () MDV3 () MDV4 () MDV5 ()
 SINGLE CERT STANDARD FOR MULTI-CLASS ENGINE FAMILY: NA
 FUEL TYPE(S): DEDICATED (X) GASOLINE (X); EXH EMIS TEST FUEL(S): INDOLINE () CBG (X)
 EVAP EMIS TEST PROCEDURE: CALIF () FED (X)
 SERVICE ACCUMULATION: STD AMA () MFR ADP (X); NMOG TEST PROCEDURE: NA () EQUIV (X)
 R/L TEST PROCEDURE: PT SOURCE (X)
 ENGINE CONFIGURATION: I4 () V6 (X) V8 () DISPLACEMENT: 4.3 LITERS / 262 CU. IN.
 VALVES / CYLINDER: 2 (X) 4 () RATED HP: 190 @ 4400 RPM
 ENGINE LOCATION: FRONT (X) DRIVE: FWD () RWD (X) 4WD-FT (X) 4WD-PT (X)
 EXHAUST EMISSION CONTROL SYSTEM: LEGR, WUTWC+TWC, SFI, 2HO2S-HO2S, AIR
 RLHP / DPA VALUES: SECTION 08.13.02.00

ENGINE CODE & LETTER DERIVATIVES*1	LOC (C/F/NW)	VEH MODELS (SEE PAGE 1)	TRANS (M5,A4,ETC.)	EQUIV. TEST WEIGHT	EGR SYSTEM PART NO.	CATALYTIC CONVERTER PART NO.
11,12	C	HT10506 T10506 S10506	A4	4750 4250	25312788	25314447- 4DR, 25173633- Warm-Up

*1 Base engine codes are the same as letter derivatives unless otherwise noted. Refer to PCM/VCM part number page for additional engine code letter derivative information.

CARLINE NAME	CARLINE CODE
GMC JIMMY 4WD	04060
CHEVROLET BLAZER 4WD	03070
BRAVADA AWD	06520
CHEVROLET BLAZER 2WD	03090
GMC JIMMY 2WD	04076

(FOR CARB USE ONLY)

E.O. #A-6-804-1

1998 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET

PCM AND CALIBRATION PART NUMBERS

MFR: GENERAL MOTORS CORP.

ENGINE FAMILY: WGMXT04.3185

EVAP FAMILY: WGMXE0095904
WGMXE0095905

<u>ENGINE CODE</u>	<u>PCM/VCM PART NUMBER</u>	<u>ENGINE CALIB</u>	<u>OPER CALIB</u>	<u>TRANS CALIB</u>
1,2	16251685	16240955	09360505PA	16241025, 16241026, 16241027
11,12		16240940		16241028, 16241029, 16241030

ISSUED: ML-WP089

REVISED: ML-WR007, ML-WP145, ML-WP152, ML-WR070, ML-WR073, ML-WR090,
ML-WR093, ML-WR090A

17-WGMXT04.3185-5
(1998)

EMISSION DATA RATIOS
TO BE USED FOR ASSEMBLY LINE TESTING

	43T6M019	
	<u>(Config 001)</u>	<u>(Config 002)</u>
NMHC* (G/MI)	.056	.057
NMOG (G/MI)	.058	.059
HCHO (G/MI)	.002	.002
NMOG:NMHC	1.036	1.035
HCHO:NMHC	.036	.035

* NMHC includes methane response factor.

Average NMOG:NMHC = 1.036

Average HCHO:NMHC = .036

Ratio established using Phase 2 emission certification fuel.

ISSUED: ML-WP074

REVISED: ML-WP176

17-WGMXT04.3187-10
(1998)