State of California AIR RESOURCES BOARD

EXECUTIVE ORDER A-9-462 Relating to Certification of New Motor Vehicles

DAIMLERCHRYSLER CORPORATION

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 2000 model-year DaimlerChrysler Corporation exhaust emission control systems are certified as described below for medium-duty vehicles:

Emission Standard Category: Low-Emission Vehicle (LEV)

Fuel Type: Gasoline

Engine Family: YCRXA0360H32 Displacement: 5.9 Liters (360 Cubic Inches)

Exhaust Emission Control Systems and Special Features:

Three Way Catalytic Converter Heated Oxygen Sensors (two) Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The non-methane organic gas (NMOG), carbon monoxide (CO), oxides of nitrogen (NOx), and formaldehyde (HCHO) LEV certification exhaust emission standards for this engine family in grams per mile are:

Test Weight (lbs.) Miles	NMOG	_CO_	NOx	НСНО	CO (20°F)
3751-5750 50,000	0.160	4.4	0.4	0.018	12.5
120,000	0.230	6.4	0.6	0.027	n/a

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.94

The certification exhaust emission values set forth for NMOG reflect application of a 0.94 RAF for 2000 model-year LEVs. The LEV certification exhaust emission values for this engine family in grams per mile are:

Test Weight (lbs.)	Miles	NMOG	<u></u>	<u>NOx</u>	нсно	CO (20°F)
3751-5750	50,000	0.131	2.4	0.3	0.003	6.7
	120,000	0.159	2.8	0.5	0.004	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the medium-duty vehicle phase-in requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles" (Title 13, California Code of Regulations, Section 1960.1(h)(2)).

BE IT FURTHER RESOLVED: That under the submitted medium-duty vehicle phase-in compliance plan, if the manufacturer incurs "Vehicle Equivalent Debits" for the aforementioned model year due to the manufacturer's failure to produce and deliver for sale in California the equivalent quantity of medium-duty vehicles certified to low-emission vehicle and/or ultra-low-emission vehicle exhaust emission standards required by the above-referenced standards and test procedures, all "Vehicle Equivalent Debits" incurred by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model- Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 3 day of August 1999

R. B) Summerfield, Chief

Mebile Source Operations Division


2000 MODEL YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: DaimlerChrysler Corp. Exh Eng Fam: YCRXA0360H32 Evap Fam: YCRXE0101G3H All Eng Codes in Eng Fam: CA X 49S 50S A8965 ORVR: YES NO X Exh Std: CA Tier-1 TLEV LEV X ULEV SULEV US: EPA Tier-1 NLEV Veh Class(es): PC LDT1 LDT2 MDV1 MDV2 X MDV3 MDV4 MDV5
Cincle Cost Ctd for Multi-Class Eng Eam. N/A (Specify: N/A, LD11, MDV1, MDV2, MDV3, MDV4)
Fuel Type(s): Dedicated X Flex-Fuel Dual-Fuel BI-Level Gasoline A Dieser
Emis Test Fuel(s): IndoCBG _X CNGLPGM85E85Other(specify)
Evaporative Emission Test Procedure: California Federal _ X Service Accum: Std AMA Mod AMA _ X _ Mfr ADP Other(specify) Pt Course
NMOG Test Procedure: N/A Std Equiv X R/L Test Proc: SHED Produce A
Engine Configuration: V-8 Displacement 5.9 Liters 350 Cools inches
Valves per Cylinder: 2 Rated Horsepower: 245 @ 4000 RPM
Engine: Front X Rear Drive: FWD RWD X 4WD-FT X 4WD-PT X
Exhaust ECS (eg. EGR, MFI, TC, CAC): HO2S(2), TWC, SFI. (use abbreviations per SAE J1930 JUN93)
Catalyat

Engine Code (also list CA/49ST/50ST)	Vehicle Models (if coded see attachment)	Trans. Type M5 A4	or Test Wt.	DPA Or RLHP	Ignition (ECM/PCM) Part No.	EGR System Part No.	Catalyst Converter Part No.
CA-100 CA	DN1L74	A4	5250	S E E A	56040408AB		5210337 4AA
CA-200 CA	DN5L74		5500	T T A C	56040408AB		521033 73AA
CA-300 CA	AN5L84		5500	H M E N T	56040406AB		52103268AC

Date Issued: 07/22	<i>y</i> 99					ŧ
Povicione:	1	1 '		l	<u></u>	

Certificate #:	California	Sales	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	YES	YES	YES	
YCRXA0360H3 YCRXE0101G3			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	QMt	SWD SUV	AND SUV	
Engine Family: YCRXA0360H32 Evaporative Fam: YCRXE0101G3H		Car Line		Dakota Pickup 4WD	Dodge Durango 2MD S	Dodge Durango	
Vehicle MFR: CHRYSLER		Model ID		AN5L84	DN11.74	DN5L74	

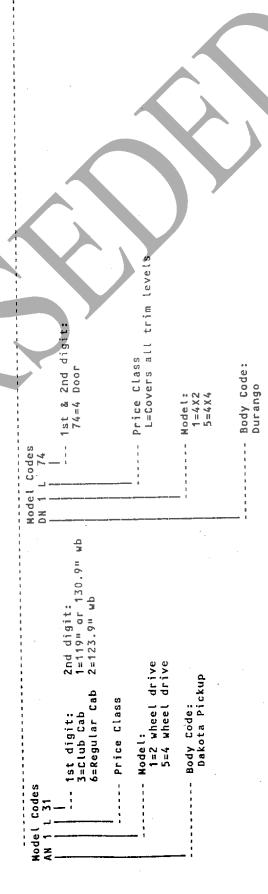

Report Date: 07/23/99

Chrysler Corporation Family Tire Usage

2000 YCRXA0360H32

LOADED VEHICLE WEIGHT

ADJUSTED LOADED VEHICLE WGT

COAST TIRE	ONAG* NMOG	TIME HP		5500 12.75 15.3 35 35		12.94 13.6 35 35		5250 14,62 11.6 35 35		15.85 12.0 35 35		5500 13.17 13.0 35 35		13,37 13,3 35 35	
COLD CO ELECTRIC DYNO COEFFICIENTS	TARGET A B C SET A B C	(LINE 1 15 20 DEG COEFFS, LINE 2 IS 50 DEG WHEN NEEDED)		91,31 0.04260	83.01 0.03873	85.64 0.04397	77.85 0.03997	76.97 0.03617	69.97 0.03288		55.49 0.03482	93.91	85.37 0.03866	84.51 0.04401	76.83 0.04001
TIRE	PRES	<u>د</u>	1	16.0 35 35	•	35 35		12.6 35 35		15.32 12.2 35 35		35 35		35 35	
	MEDYNG	#	1	16.0		14.7		12.6		12.2		12.65 14.2 35 35		13.01 14.5	
COAST	DOMN *DYNO	ENG TRANS C GUM TYPE ETW USE YR COD MFG OPT TIME		ANE 18. EM DET 4U Y 6010 C 5000 STD 00 182 12A 12.17		12.31 14.7 35 35		14,38		15.32		12.65		13.01	
	PTTON	HFC OF		TZA		TZA		7.74		TZH		12A		TZA	
	TOUSE	000	1	0 152		OPT ON THE YZA		STD 00 152 174	1	OPT OO ISC TZH	i i •	STD 00 1SZ 1ZA		OPT 00 TUT TZA	
	1011	OSE		STD 0		OPT O		STD 0	1	OPT 0		STD 0		OPT 0	
	77			5000								5250			
	TAM	17PE		 :)			ر	,			ن	3		
		Š		, 401G	3			0005 J 0509 V La Ton 102 27 1440				0525 3 0079 A N7 130 IM3 72 1300	;		
	•) SKY		. 77	-			70	<u> </u>			n7 1			
		16 TR	!	; (2) ; =	7			700	5			20	1		
		<u> </u>	į	: 6	i 5			77. 51	1 F			77. 51	<u>i</u>		
		MODE	2	445	Ē			1	5			PAG.	Š		

/ 10. - 1306 - 400 /

Report Date: 06/05/99 Time: 07:41:21

* - For DYNO HP = 0.00 Ref To FRONTAL AREA

Chrysler Corporation	FAMILY TIRE DESCRIPTION



/ 10. - 1306 - 401 /

2000 YCRXA0360H32