

File

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-10-684
Relating to Certification of New Motor Vehicles

FORD MOTOR COMPANY

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That Ford Motor Company 1997 model-year exhaust emission control systems are certified as described below for passenger cars:

Emission Standard Category: Transitional Low-Emission Vehicle (TLEV)

Fuel Type: Gasoline

Engine Family: VFM2.0VJG2HK Displacement: 2.0 Liters (122 Cubic Inches)

Exhaust Emission Control Systems & Special Features:

- Warm Up Three Way Catalytic Converter
- Three Way Catalytic Converter
- Heated Oxygen Sensors (two)
- Exhaust Gas Recirculation
- Sequential Multiport Fuel Injection

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The TLEV certification exhaust emission standards for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Organic Gases</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Formaldehyde</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.125	3.4	0.4	0.015	10.0
100,000	0.156	4.2	0.6	0.018	n/a

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.98

The certification exhaust emission values set forth for non-methane organic gases (NMOG) reflect application of a 0.98 RAF for 1997 model-year TLEVs. The TLEV certification exhaust emission values for this engine family in grams per mile are:

<u>Miles</u>	<u>Non-Methane Organic Gases</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Formaldehyde</u>	<u>Carbon Monoxide (20°F)</u>
50,000	0.070	0.8	0.1	0.0005	6.5
100,000	0.076	0.9	0.1	0.001	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the 50,000-mile evaporative emission standards applicable to 1980 through 1994 model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That, based on the evaporative emission phase-in compliance schedule submitted by the vehicle manufacturer, the listed vehicle models shall not be subject to the running loss and useful life standards set forth in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).


BE IT FURTHER RESOLVED: That the manufacturer is certifying the listed vehicle models with a partially complying on-board diagnostic system for the aforementioned model year pursuant to Title 13, California Code of Regulations, Section 1968.1(m)(6.2) ("Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty vehicles and Engines").

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations,

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 1st day of August 1996.

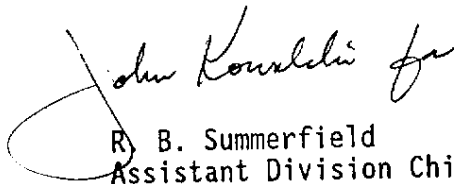

R. B. Summerfield
Assistant Division Chief
Mobile Source Division

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Ford Motor Company Exhaust Engine Family: VFM2.0VJG2HK

Evap Standard: 50K Useful Life with R/L _____ Evap Family: VFM1065BYPAB

Exhaust Std: Tier 0 Tier 1 TLEV LEV ULEV ZEV ; EPA Tier 0 Tier 1

Vehicle Class(es): PC LDT1 LDT2 MDV1 MDV2 MDV3 MDV4 MDV5

Single Cert Std for Multi-Class Eng Fam: N/A (specify N/A, LDT1, MDV1, MDV2, MDV3, MDV4)

Exh Cert Fuel(s): Indo Ph2 Diesel: 13 CCR 2282 or 40 CFR 86.113-90 or -94
M85 CNG LPG Other (specify) _____

Fuel Type(s): Dedicated Flex-Fuel Dual-Fuel Gasoline Diesel M85
CNG LNG LPG Other (specify) _____

Hybrid: Type A B C APU Cycle (e.g., Otto, Diesel, Turbine) _____

Engine Config: I-4 Liter (CID): 2.0 (121.5)

Engine: Front Mid Rear Drive: FWD RWD 4WD-FT 4WD-PT

Exhaust ECS & Special Features: SFI/HO2S/EGR/TWC/MU-TWC
(Use abbreviations per SAE J1930, Sep 91)

Engine Code (California)	Vehicle Models	Trans. Type A-Automatic M-Manual	ETW	DPA	Ignition (PCM) Part No.	EGR System Part No.	Catalyst Part No.
62FSDM1N	Probe	M5	3000	6.2 ¹ 5.8 ² 5.5 ³	Distributor: FSB9 18 200 ECU: FSF9 18 881A	FS56 20 600	B6CK 20 500B FSC5 20 600
62FSDM1A	Probe	M5	3000	6.8 ¹ 6.4 ² 6.0 ³			
62FSDA1N	Probe	L4	3125	6.2 ¹ 5.8 ² 5.5 ³	Distributor: FSB9 18 200 ECU: FSG1 18 881A		
62FSDA1A	Probe	L4	3125	6.8 ¹ 6.4 ² 6.0 ³			

¹ P195/65R14² P205/55R15 with LX fascia³ P205/55R15 with SE fascia

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Ford Motor Company Exhaust Engine Family: VFM2.0VJG2HK

Evap Standard: 50K X Useful Life with R/L _____ Evap Family: VFM1065BYPAB

Exhaust Std: Tier 0 ___ Tier 1 ___ TLEV X LEV ___ ULEV ___ ZEV ___ ; EPA Tier 0 ___ Tier 1 ___
NMOG Test Proc: Std.

Vehicle Class(es): PC X LDT1 ___ LDT2 ___ MDV1 ___ MDV2 ___ MDV3 ___ MDV4 ___ MDV5 ___

Service Accum: AMA
Single Cert Std for Multi-Class Eng Fam: N/A (specify N/A, LDT1, MDV1, MDV2, MDV3, MDV4)

Exh Cert Fuel(s): Indo ___ Ph2 X Diesel: 13 CCR 2282 ___ or 40 CFR 86.113-90 ___ or -94 ___
M85 ___ CNG ___ LPG ___ Other (specify) _____

Fuel Type(s): Dedicated ___ Flex-Fuel ___ Dual-Fuel ___ Gasoline X Diesel ___ M85 ___
CNG ___ LNG ___ LPG ___ Other (specify) _____

Hybrid: Type A ___ B ___ C ___ , APU Cycle (e.g., Otto, Diesel, Turbine) _____

Engine Config: I-4 Liter (CID): 2.0 (121.5)

Engine: Front X Mid ___ Rear ___ Drive: FWD X RWD ___ 4WD-FT ___ 4WD-PT ___

Exhaust ECS & Special Features: SFI/HO2S/EGR/TWC/WU-TWC
(Use abbreviations per SAE J1930, Sep 91)

Engine Code (California)	Vehicle Models	Trans. Type A-Automatic M-Manual	ETW	DPA	Ignition (PCM) Part No.	EGR System Part No.	Catalyst Part No.
62FSDM0N	Probe	M5	3000	6.2 ¹ 5.8 ² 5.5 ³	Distributor: FSB9 18 200 ECU: FSF9 18 881A	FS56 20 600	B6CK 20 500B FSC5 20 600
62FSDM0A	Probe	M5	3000	6.8 ¹ 6.4 ² 6.0 ³			
62FSDA0N	Probe	L4	3125	6.2 ¹ 5.8 ² 5.5 ³	Distributor: FSB9 18 200 ECU: FSG1 18 881A		
62FSDA0A	Probe	L4	3125	6.8 ¹ 6.4 ² 6.0 ³			

¹ P195/65R14² P205/55R15 with LX fascia³ P205/55R15 with SE fascia

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Ford Motor Company Exhaust Engine Family: VFM2.0VJG2HK
 Evap Standard: 50K Useful Life with R/L _____ Evap Family: VFM1065BYPAB
 Exhaust Std: Tier 0 Tier 1 TLEV LEV ULEV ZEV ; EPA Tier 0 Tier 1
 Vehicle Class(es): PC LDT1 LDT2 MDV1 MDV2 MDV3 MDV4 MDV5
 Single Cert Std for Multi-Class Eng Fam: N/A (specify N/A, LDT1, MDV1, MDV2, MDV3, MDV4)
 Exh Cert Fuel(s): Indo Ph2 Diesel: 13 CCR 2282 or 40 CFR 86.113-90 or -94
 M85 CNG LPG Other (specify) _____
 Fuel Type(s): Dedicated Flex-Fuel Dual-Fuel Gasoline Diesel M85
 CNG LNG LPG Other (specify) _____
 Hybrid: Type A B C APU Cycle (e.g., Otto, Diesel, Turbine) _____
 Engine Config: I-4 Liter (CID): 2.0 (121.5)
 Engine: Front Mid Rear Drive: FWD RWD 4WD-FT 4WD-PT
 Exhaust ECS & Special Features: SFI/HO2S⁽²⁾/EGR/TWC/MU-TWC
 (Use abbreviations per SAE J1930, Sep 91)

Engine Code (California)	Vehicle Models	Trans. Type A-Automatic M-Manual	ETW	DPA	Ignition (PCM) Part No.	EGR System Part No.	Catalyst Part No.
62FSDM1N	Probe	M5	3000	6.2 ¹ 5.8 ² 5.5 ³	Distributor: FSB9 18 200 ECU: FSF9 18 881B	FS56 20 600	B6CK 20 500B FSC5 20 600
62FSDM1A	Probe	M5	3000	6.8 ¹ 6.4 ² 6.0 ³			
62FSDA1N	Probe	L4	3125	6.2 ¹ 5.8 ² 5.5 ³	Distributor: FSB9 18 200 ECU: FSG1 18 881B		
62FSDA1A	Probe	L4	3125	6.8 ¹ 6.4 ² 6.0 ³			

¹ P195/65R14
² P205/55R15 with LX fascia
³ P205/55R15 with SE fascia

1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Ford Motor Company Exhaust Engine Family: VFM2.0VJG2HK

Evap Standard: 50K Useful Life with R/L _____ Evap Family: VFM1065BYPAB

Exhaust Std: Tier 0 Tier 1 TLEV LEV ULEV ZEV ; EPA Tier 0 Tier 1

Vehicle Class(es): PC LDT1 LDT2 MDV1 MDV2 MDV3 MDV4 MDV5

Single Cert Std for Multi-Class Eng Fam: N/A (specify N/A, LDT1, MDV1, MDV2, MDV3, MDV4)

Exh Cert Fuel(s): Indo Ph2 Diesel: 13 CCR 2282 or 40 CFR 86.113-90 or -94
M85 CNG LPG Other (specify) _____

Fuel Type(s): Dedicated Flex-Fuel Dual-Fuel Gasoline Diesel M85
CNG LNG LPG Other (specify) _____

Hybrid: Type A B C APU Cycle (e.g., Otto, Diesel, Turbine) _____

Engine Config: I-4 Liter (CID): 2.0 (121.5)

Engine: Front Mid Rear Drive: FWD RWD 4WD-FT 4WD-PT

Exhaust ECS & Special Features: SFI/HO2S/EGR/TWC/WU-TWC
(Use abbreviations per SAE J1930, Sep 91)

Engine Code (California)	Vehicle Models	Trans. Type A-Automatic M-Manual	ETW	DPA	Ignition (PCM) Part No.	EGR System Part No.	Catalyst Part No.
62FSDM2N	Probe	M5	3000	6.2 ¹ 5.8 ² 5.5 ³	Distributor: FSB9 18 200 ECU: FSF9 18 881C	FS56 20 600	B6CK 20 500B FSC5 20 600
62FSDM2A	Probe	M5	3000	6.8 ¹ 6.4 ² 6.0 ³			
62FSDA2N	Probe	L4	3125	6.2 ¹ 5.8 ² 5.5 ³	Distributor: FSB9 18 200 ECU: FSG1 18 881C		
62FSDA2A	Probe	L4	3125	6.8 ¹ 6.4 ² 6.0 ³			

¹ P195/65R14
² P205/55R15 with LX fascia
³ P205/55R15 with SE fascia