

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-23-261-1
Relating to Certification of New Motor Vehicles

HONDA MOTOR CO., LTD.

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That 1999 model-year Honda Motor Co., Ltd. exhaust emission control systems are certified as described below for light-duty trucks:

Emission Standard Category: Low-Emission Vehicle (LEV)

Fuel Type: Gasoline

Engine Family: XHNXT03.5EA3 Displacement: 3.5 Liters (212 Cubic Inches)

Exhaust Emission Control Systems and Special Features:

- Three Way Catalytic Converter
- Heated Oxygen Sensors (two)
- Sequential Multiport Fuel Injection
- Exhaust Gas Recirculation

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The non-methane organic gas (NMOG), carbon monoxide (CO), oxides of nitrogen (NOx), and formaldehyde (HCHO) LEV certification exhaust emission standards for this engine family in grams per mile are:

Loaded Vehicle Weight (lbs.)	Miles	NMOG	CO	NOx	HCHO	CO (20°F)
3751-5750	50,000	0.100	4.4	0.4	0.018	12.5
	100,000	0.130	5.5	0.5	0.023	n/a

Reactivity Adjustment Factor (RAF) for NMOG Mass Emission: 0.94

The certification exhaust emission values set forth for NMOG reflect application of a 0.94 RAF for 1999 model-year LEVs. The LEV certification exhaust emission values for this engine family in grams per mile are:

Loaded Vehicle Weight (lbs.)	Miles	NMOG	CO	NOx	HCHO	CO (20°F)
3751-5750	50,000	0.061	0.9	0.2	0.001	2.8
	100,000	0.069	1.3	0.3	0.001	n/a

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the aforementioned exhaust emission standards based on its submitted plan to comply with the fleet average NMOG exhaust mass emission requirements as set forth in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That under the submitted NMOG fleet average compliance plan, if the manufacturer incurs a NMOG debit for the aforementioned model year based on the projected NMOG fleet average exceeding the value required by the above-referenced standards and test procedures, all incurred NMOG debits by the manufacturer shall be equalized as required by the standards and test procedures.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying the listed vehicle models to the running loss and useful life standards applicable to 1995 and subsequent model-year vehicles in the "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Motor Vehicles," and the listed vehicle models comply with those standards.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" for the aforementioned model year (Title 13, California Code of Regulations, Section 2235).

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high-altitude requirements and highway emission standards, and with the California Inspection and Maintenance emission standards in place at the time of certification, as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control and Smog Index Label Specifications" for the aforementioned model year (Title 13, California Code of Regulations, Section 1965).

BE IT FURTHER RESOLVED: That the vehicle manufacturer has demonstrated compliance with the exhaust emission standards at 50 degrees Fahrenheit as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles."

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "Malfunction and Diagnostic System Requirements--1994 and Subsequent Model-Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles and Engines" (Title 13, California Code of Regulations, Section 1968.1) for the aforementioned model year.


BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executive Order A-23-261 dated October 09, 1998, is canceled and replaced by Executive Order A-23-261-1.

Executed at El Monte, California this 11th day of January 1999.

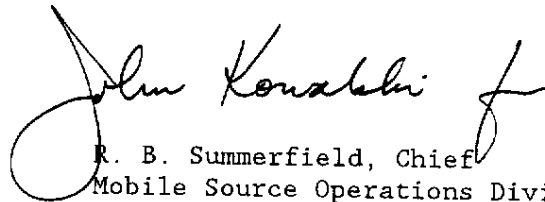

R. B. Summerfield, Chief
Mobile Source Operations Division

1999 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

E.O. # A-23-261-1
Page 1 of 1

Manufacturer: HONDA Exh Engine Family: XHNXT03.5EA3 EVAP Family: XHNXE0130AAE
 All Engine Codes in Engine Family: CA ___ 49S ___ 50S X AB965 ___ ORVR: YES ___ NO X
 Exh std: CA Tier-1 ___ TLEV ___ LEV X ULEV ___ SULEV ___ US EPA Tier-1 ___
 Veh Class(es): PC ___ LDT1 ___ LDT2 X MDV1 ___ MDV2 ___ MDV3 ___ MDV4 ___ MDV5 ___
 Single Cert Std for Multi-Class Eng Fam: N/A (specify: N/A, LDT1, MDV1, MDV2, MDV3, MDV4)
 Fuel Type(s): Dedicated X Flex-Fuel ___ Dual-Fuel ___ Bi-Fuel ___ Gasoline X
 Diesel ___ CNG ___ LNG ___ LPG ___ M85 ___ other (specify) ___
 Exh Emiss Test Fuel(s): Indo ___ CBG X CNG ___ LPG ___ M85 ___ other (specify) ___
 Diesel: 13 CCR 2282 ___ 40 CFR 86.113-90 ___ 40 CFR 86.113-94 ___
 Evaporative Emission Test Procedure: California ___ Federal X
 Service Accum: Std AMA ___ Mod AMA ___ Mfr ADP X Other (specify) ___
 NMOG Test Procedure: N/A ___ Std ___ Equip X R/L Test Proc: SHED ___ Pt Source X
 Engine Configuration: V-6 Displacement: 3.5/212 Liters/Cubic Inches
 Valves per Cylinder: 4 Rated HP: 205 @ 5200 RPM, Engine: Front X Mid ___ Rear ___
 Drive: FWD X RWD ___ 4WD-FT ___ 4WD-PT ___
 Exhaust ECS (e.g., MFI, EGR, TC, CAC): TWC/HO2S(2)/EGR/SFI
 (use abbreviations per SAE J1930 JUN93)

Engine Code (also list CA/49ST/50ST)	Vehicle Models (if coded see attachment)	Trans. (M5, A4 etc.)	ETW or Test Wt.	DPA or RLHP	ECM/PCM Part No.	Ignition Part No.	EGR System Part No.	Catalytic Converter Part No.
XEA3/1 (50ST)	Odyssey EX	L4	4500	9.6 (MIA)	PCM: 37820-P8F-A61	Ignition Coil: CM11-207	EGR Valve: 18710-P8F -A010	PC
	Odyssey LX Odyssey VAN	L4	4500	9.9 (BFS)	PCM: 37820-P8F-A51			