

State of California  
AIR RESOURCES BOARD

EXECUTIVE ORDER A-21-217

Relating to Certification of New Heavy-Duty Motor Vehicle Engines

CUMMINS ENGINE COMPANY, INC.

Pursuant to the authority vested in the Air Resources Board by Sections 43100, 43102 and 43103 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following Cummins Engine Company, Inc. 1998 model diesel engines are certified for use in motor vehicles with a manufacturer's gross vehicle weight rating (GVWR) over 14,000 pounds:

Fuel Type: Diesel

<u>Engine Family</u>	<u>Liters (Cubic Inches)</u>		<u>Exhaust Emission Control Systems and Special Features</u>
WCEXH0505CAD (413K)	8.3	505	Charge Air Cooler Turbocharger Powertrain Control Module

Engine models and codes are listed on attachments.

The following are the certification exhaust emission standards for this engine family in grams per brake-horsepower-hour:

<u>Non-Methane Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulates</u>
1.3	15.5	4.0	0.10

The following are the certification exhaust emission values for this engine family in grams per brake-horsepower-hour:

<u>Non-Methane Hydrocarbons</u>	<u>Carbon Monoxide</u>	<u>Nitrogen Oxides</u>	<u>Particulates</u>
0.3	1.0	4.0	0.09

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2035 et seq.).

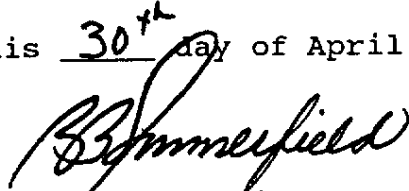
BE IT FURTHER RESOLVED: That the aforementioned engine family has been conditionally certified subject to the following conditions:

1. Any engine which employs a defeat device shall not be covered by this Executive Order.
2. Within 90 days following the issuance of this Executive Order, the manufacturer must show cause, to the satisfaction of the Executive Officer or his designee, that the strategy for fuel injection timing, including timing during the fuel economy mode, is not a defeat device.

Engines certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachments.

Executed at El Monte, California this 30<sup>th</sup> day of April 1998.

  
R. B. Summerfield, Chief  
Mobile Source Operations Division

# LARGE ENGINE MODEL SUMMARY

Manufacturer: **Cummins Engine Company, Inc.** Process Code: **New Submission**  
 EPA Engine Family: **WCXEH0505CAD** Manufacturer Family Name: **413K**

1. Engine Code	2. Engine Model	3. BHP@RPM (SAE Gross)	4. Fuel Rate: mm <sup>3</sup> /stroke @ peak HP (for diesel only)	5. Fuel Rate: (lbs/hr) @ peak HP (for diesels only)	6. Torque @ RPM (SEA Gross)	7. Fuel Rate: mm <sup>3</sup> /stroke@peak torque	8. Fuel Rate: (lbs/hr)@peak torque	9. Emission Control Device Per SAE J1830
CPL2092	ISC 300	310@2000	157	105.9	950@1300	179	78.3	PCM, TC, CAC
FR90173								
CPL2230	ISC 285	300@2000	150	100.9	860@1300	160	70.3	PCM, TC, CAC
FR90257								
CPL2231	ISC 275	285@2000	141	94.9	800@1300	150	65.9	PCM, TC, CAC
FR90255								
CPL2232	ISC 250	265@2000	132	89.3	800@1300	151	66.3	PCM, TC, CAC
FR90258								