

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER A-14-162
Relating to Certification of New Motor Vehicles

TOYOTA MOTOR CORPORATION

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapter 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Orders G-45-3 and G-45-4;

IT IS ORDERED AND RESOLVED: That 1990 model-year Toyota Motor Corporation emission control systems are certified as described below for gasoline-powered passenger cars:

Engine Family: LTY2.0V5FBD1 Displacement: 2.0 Liters (122 Inches³)

Equipped with the following exhaust emission control systems:

Exhaust Gas Recirculation
Oxygen Sensor
Three-Way Catalyst
Multipoint Electronic Fuel Injection
On-Board Diagnostic System (Exempted)

Vehicle models, transmissions, engine codes and evaporative emission control families are listed on attachments.

The following are the emission standards for this engine family:

<u>Hydrocarbons</u> <u>(Grams per Mile)</u>	<u>Carbon Monoxide</u> <u>(Grams per Mile)</u>	<u>Nitrogen Oxides</u> <u>(Grams per Mile)</u>
0.39	7.0	0.7

The following are the certification emission values for this engine family:

<u>Hydrocarbons</u> <u>(Grams per Mile)</u>	<u>Carbon Monoxide</u> <u>(Grams per Mile)</u>	<u>Nitrogen Oxides</u> <u>(Grams per Mile)</u>
0.11	0.7	0.3

BE IT FURTHER RESOLVED: That the listed models are certified to the optional NOx emission standard thereby making the vehicle manufacturer subject to Section 1960.1.5 of Title 13, California Code of Regulations which includes recall liability for emission control components up to 7 years or 75,000 miles if found defective by the Executive Officer.

BE IT FURTHER RESOLVED: That the vehicle manufacturer is certifying to the optional NOx standard based on actual sales of 1989 model-year California-certified passenger cars.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with "California Evaporative Emission Standards and Test Procedures for 1978 and Subsequent Model Gasoline-Powered Motor Vehicles".

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's "Specifications for Fill Pipes and Openings of Motor Vehicle Fuel Tanks" (Title 13, California Code of Regulations, Section 2290) for the aforementioned model-year.

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the Board's high altitude requirements and highway emission standards as stipulated in "California Exhaust Emission Standards and Test Procedures for 1988 and Subsequent Model Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles".

BE IT FURTHER RESOLVED: That the listed vehicle models also comply with the "California Motor Vehicle Emission Control Label Specifications" (Title 13, California Code of Regulations, Section 1965) for the aforementioned model year.

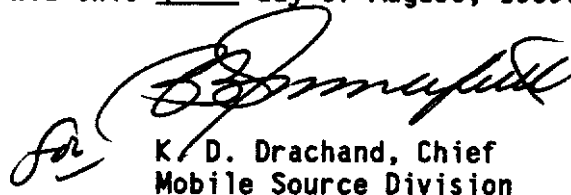
BE IT FURTHER RESOLVED: That the vehicle models listed have been granted an exemption from compliance with the requirements of the "Malfunction and Diagnostic System for 1988 and Subsequent Model Year[s]..." (Title 13, California Code of Regulations, Section 1968) for the aforementioned model year.

BE IT FURTHER RESOLVED: That for the listed vehicles, the manufacturer has submitted and the Executive Officer hereby approves the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (California Health and Safety Code Section 43205).

Vehicles certified under this Executive Order must conform to all applicable California emission regulations.

The Bureau of Automotive Repair will be notified by copy of this order and attachment.

Executed at El Monte, California this 15th day of August, 1989.


K. D. Drachand, Chief
Mobile Source Division

1990 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET

Page _____

Manufacturer TOYOTA Engine family LTY2.0V5FBD1
 Passenger Cars x Light-Duty Trucks Medium-Duty Vehicles Gas x Diesel
 Eng. Type 4 cyl. in-line Liter (CID) 2.0 (121.9) Evap. Family EV-E
 Emission Control Sys. (Use SAE Abbrv.) MPI + EGR + O2S + TWC
 Engine : Front x Mid. Rear Drive: FWD RWD 4WD-FT x 4WD-PT

Engine Code/ (Cert std.)	Veh. Models (If Coded see attachmt.)	Trans. Type: A-Auto M-Man.	Equiv. Test Weight	RLHP or DPA	Ign. System (ECU/PROM) Part No.	EGR System Part No.	Catalyst Part No.
1 & 2	SV25L-UEMDKA	M5	3,500	8.5 9.4	89661-32371	25620-74140	Manifold converter : 25508-74130 (S12)*1
1R1, 2R1, 1R2 & 2R2	SV25L-UEMDKA	M5	3,500	8.5 9.4	89661-32373		Under floor : 18450-74260 (02)*1

Comments : Please refer to manufacturer's HP list for correct dyno test HP setting based on model and equipment.

Note *1 : Parenthetical information represents identifying marks found on production parts.

VEHICLE MODELS :

Camry
SV25L-UEMDKA